



PRODUCT SPECIFICATION

LCD Android Board
HD-3568SC

Version: V1.0

Update History

Version	Release time	Description
V1.0	Nov. 6, 2024	First official release.

Contents

Chapter I Product Description	4
I . Overview	4
II . Features	4
Chapter II Specifications	5
I . Basic Parameters	5
1. Hardware Parameters	5
2. Software Parameters	7
II. Dimensions	8
III. Product Interface Diagram	9
IV. Interface parameter description	9
1. Power Interface	9
2. MIC Interface (Microphone)	10
3. LED/IR Interface (Remote control)	10
4. EDP_BL Interface (EDP Backlight)	10
5. EDP Interface	11
6. LVDS_BL Interface (LVDS Backlight)	12
7. LVDS Interface	12
8. MIPI_DSI Interface	13
9. USB Interface	14
10. SPK Interface (Amplifier)	15
11. GPIO Interface (Extension) and Definition	15
12. UART (Serial port) Interface	15
13. DEBUG Interface	16
14. CTP Interface	16
15. POE Interface	17
16. KEY Interface	17
17. MCU Interface	17
18. Other Interfaces	18
Chapter III Communication Methods	18
I . Wi-Fi Update Program	18
II . U-disk Update Program	19
III. TF Card Update Program	19
IV. Ethernet Cable to Update	20
V. Internet Update	20
Chapter IV Appendix: Product Appearance	21

Chapter I Product Description

I . Overview

HD-3568S is a well-built LCD display Android motherboard, which adopts Rockchip RK3568 quad-core chip solution, equipped with Android11 system, and the main frequency can reach up to 2.0GHz, with super performance. Adopt Mali-G52 GPU, support 4K 60fps H.265/H.264 video decoding. Support infrared remote control, Wi-Fi, RJ45 and other rich interfaces, widely used in intelligent control fields such as advertising machines, interactive all-in-one machines, security, medical, transportation, finance, industrial control, etc.

II . Features

- High performance. The RK3568 chip adopts the quad-core ARM Cortex-A55 architecture, and the main frequency can reach up to 2.0GHz, it can play high-definition video in various formats and handle complex interactive operations.
- High stability. RK3568 Android all-in-one board adds unique technology to ensure product stability in terms of hardware and software, and can make the final product reach 7*24 hours unattended.
- High integration. RK3568 Android all-in-one board integrates Ethernet, EDP, Wi-Fi, power amplifier, and TF expansion card, USB expansion port, IR remote control function, TP, HDMI, LVDS, MIPI interface, backlight control, microphone and other functions.
- High scalability. 4*USB (2 pins, 2 standard USB 3.0), 4 serial ports + 1 scalable debug serial port + 1 MCU programming serial port, 5 IO expansion ports can expand more peripheral devices.
- High definition. Supports LCD displays with various LVDS/EDP/HDMI/MIPI interfaces, and supports cutting screens of various sizes and resolutions.
- It perfectly supports multiple mainstream touch screen functions such as multi-point infrared touch, multi-point capacitive touch, multi-point nano-film touch, multi-point acoustic wave touch, and multi-point optical touch.

Chapter II Specifications

I . Basic Parameters

1. Hardware Parameters

Hardware specifications	
CPU	RK3568, quad-core, up to 2.0GHz
GPU	Mali-G52 GPU supports OpenGL ES 1.1/2.0/3.2, OpenCL 2.0 and Vulkan 1.1
NPU	1TOPS
RAM/ Storage	2GB+32GB、4GB+32GB、4G+64G
Network	Support RJ45 R/A 100M Ethernet, support Ethernet; Support 2.4GHz Wi-Fi; support Wi-Fi 802.11b/g/n protocol; Support Bluetooth 4.2.
Image rotation	Support 0 degree, 90 degree, 180 degree, 270 degree manual rotation; optional gravity sensor, support automatic rotation
Display interface	1*LVDS interface (single/dual, 6-bit/8-bit), support 3.3V/5V/12V power supply 1 channel EDP interface, support 1920*1080 pixels 1 channel HDMI interface, support 4K display 1 channel MIPI interface, support 1920*1080 pixels Onboard backlight control supports 12V backlight power supply
Audio	Support standard left and right channel line output; support 3.5mm audio output interface
Amplifier	2-way output (8 ohms 5 watts dual audio amplifier output)
Microphone	Differential MIC input
Touch screen	Support USB multi-point infrared touch, multi-point capacitive touch, multi-point Nano film touch, multi-point sound wave Touch, multi-point optical touch and more.
RTC	Built-in real-time clock function
USB	1-way USB-3.0 HOST, 1-way USB 3.0 OTG, 2-way extended USB port
Infrared	Infrared receiving socket, support infrared remote control function


LED	1*power status LED (green), 1*system LED (green, flashing by default)
Button	1*upgrade key
Serial port	4-way UART, 1-way DEBUG, 1-way MCU programming serial port; optional RS232, RS485
GPIO	5-way IO input and output control, can be used for key scanning control
KEY	Support physical switch
Storage humidity	10%~90%, no condensation
Storage temperature	-40°C~70°C
Operating temperature	-20°C~70°C

2. Software Parameters


Software specifications	
Operating system	Android 11.0
Audio	MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3GPP and other formats
Video	Support H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 and other video formats
Picture	Support JPG, BMP, PNG and other image formats
Built-in APP default	APK Installer, Email, Calculator, Browser, Voice Recorder, Calendar, Settings, Clock, Video Player, Search, Contacts, Gallery, Downloads, Camera, Music, Explorer, etc.
Language	Support multi-languages
Input method	Standard Android keyboard, optional third-party input method
System Management	Original ecological Android system, open root privileges, and can carry out product customization development
	Real-time remote monitoring, system crash self-recovery, 7*24 hours unattended
	Support OTA remote upgrade; support U disk upgrade
	Support boot animation definition
	Support server/standalone mode switching
	Support Wi-Fi hotspot
System watchdog	Support software watchdog, hardware watchdog

II. Dimensions

1. unit: mm

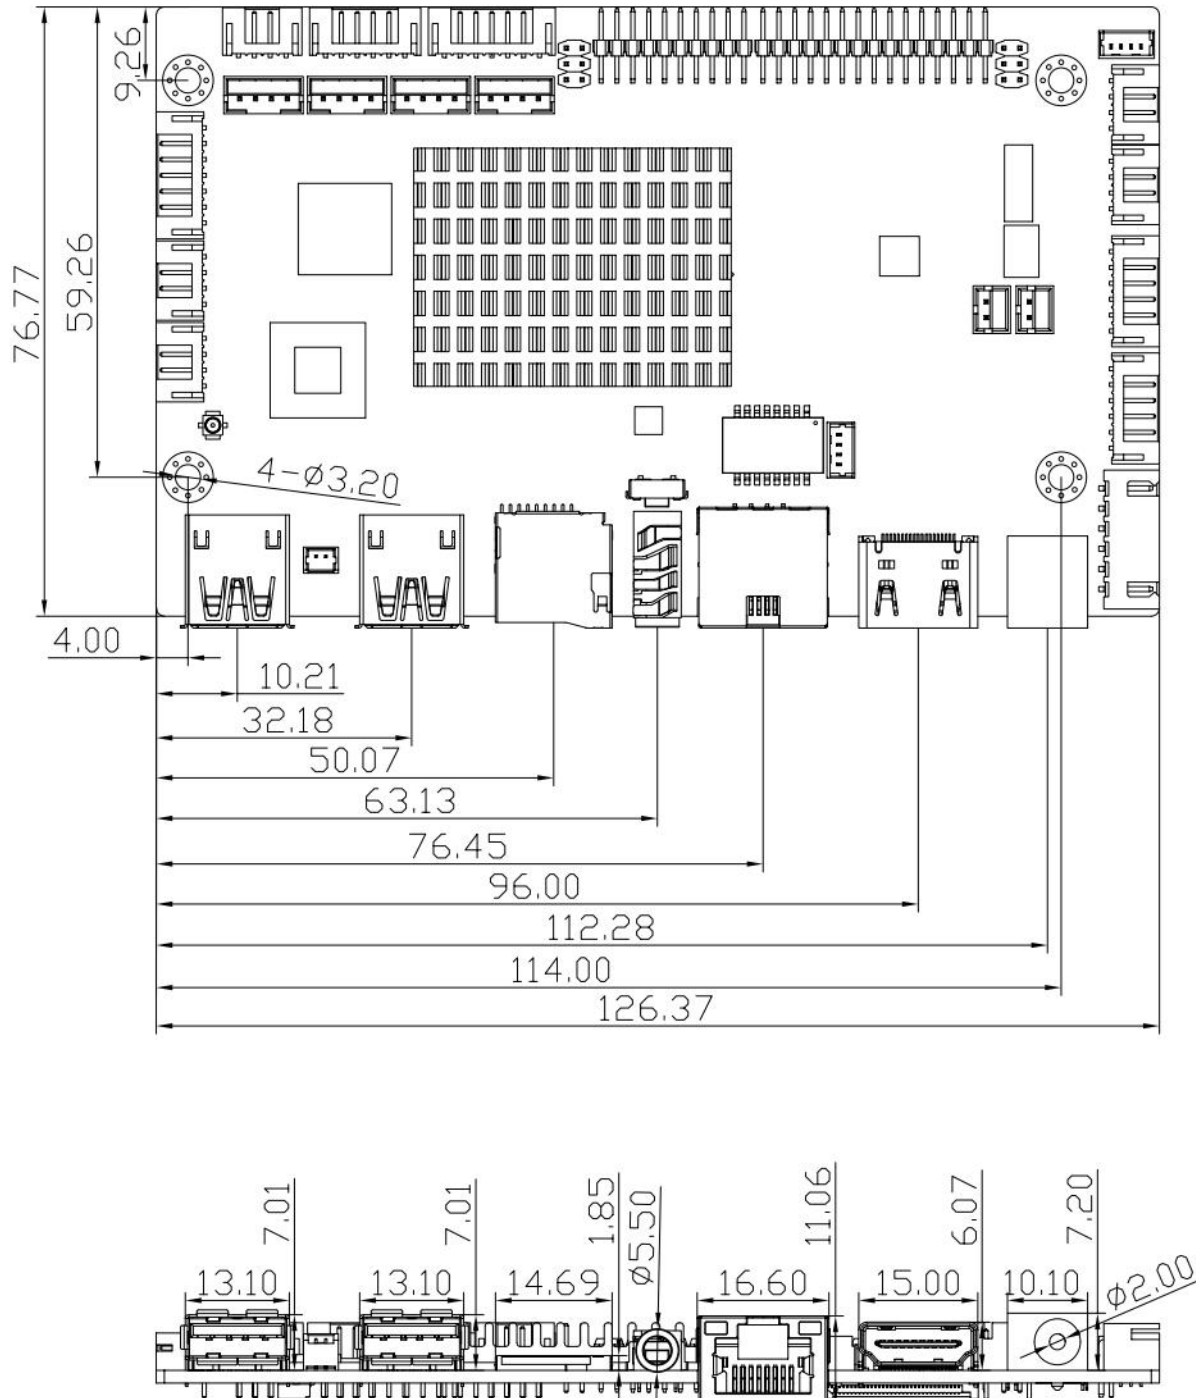


III. Product Interface Diagram

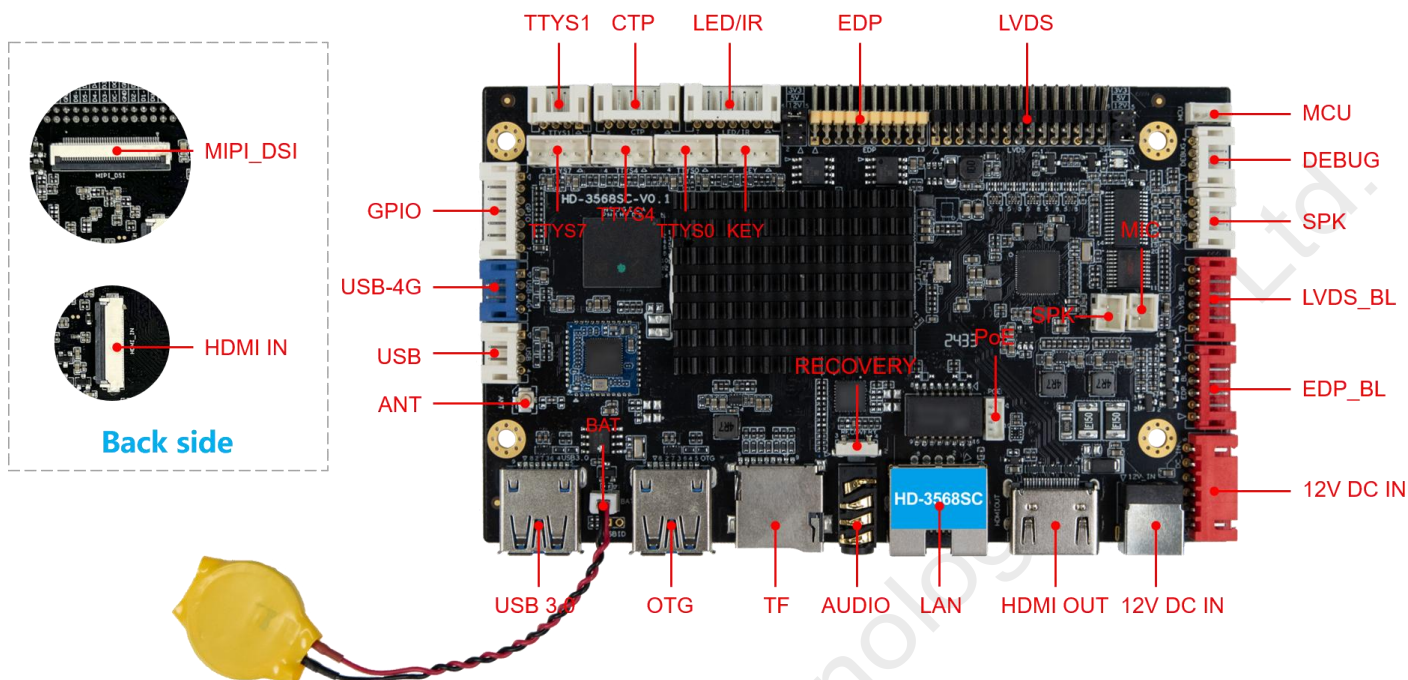

IV. Interface parameter description

1. Power Interface

12V DC power supply is used for power supply, and only DC socket and power socket are allowed to supply power to the board system.

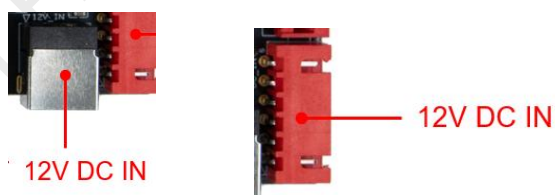

No.	Definition	Attributes	Description
6	12V	input	12V input
5	12V	input	12V input
4	GND	ground wire	ground wire
3	GND	ground wire	ground wire
2	5VS	input	standby 5V input
1	STB	output	standby signal output

Note: The inner diameter of the DC power port is 2.0mm, and the outer diameter is 5.8mm.

2. MIC Interface (Microphone)



No.	Definition	Attributes	Description
1	MIC+	input	MIC+input
2	MIC-	input	MIC-input

3. LED/IR Interface (Remote control)



No.	Definition	Attributes	Description
1	RED	output	Red light
2	3V3	power supply	3.3V output
3	GRN	output	green light
4	IO6	output	remote control signal output
5	IR	input	remote control signal input
6	GND	ground wire	ground wire
7	3V3	power supply	3.3Voutput

4. EDP_BL Interface (EDP Backlight)



No.	Definition	Attributes	Description
1	GND	ground wire	ground wire
2	GND	ground wire	ground wire
3	ADJ	output	Backlight Brightness Control

4	EN	output	Backlight Enable Control
5	12V	power supply	12V output
6	12V	power supply	12V output

5. EDP Interface



EDP

This interface is a common EDP screen interface in the form of 10*2 double-row pins. The screen voltage can be selected through the jumper cap, and it can choose to support 3.3V/5V/12V screen power supply.

In order to avoid burning the board and screen, please pay attention to the following:

Confirm whether the screen specification book screen power supply voltage is correct, and whether the corresponding power supply of the board can meet the maximum working current of the screen.

No.	Definition	Attributes	Description
1	VCC	Power supply	Output
2	VCC	Power supply	Output
3	GND	Ground wire	Ground wire
4	GND	Ground wire	Ground wire
5	D0-	Output	Display Port Lane 0 negative output
6	D0+	Output	Display Port Lane 0 positive output
7	D1-	Output	Display Port Lane 1 negative output
8	D1+	Output	Display Port Lane 1 positive output
9	D2-	Output	Display Port Lane 2 negative output
10	D2+	Output	Display Port Lane 2 positive output
11	D3-	Output	Display Port Lane 3 negative output
12	D3+	Output	Display Port Lane 3 positive output
13	GND	Ground wire	Ground wire
14	GND	Ground wire	Ground wire
15	AU-	Output	Display Port AUX- channel negative signal
16	AU+	Output	Display Port AUX+ channel positive signal
17	GND	Ground wire	Ground wire
18	GND	Ground wire	Ground wire
19	3V3	Power supply	Output
20	HPD	Input	Screen hot plug detection signal

6. LVDS_BL Interface (LVDS Backlight)



No.	Definition	Attributes	Description
1	GND	ground wire	ground wire
2	GND	ground wire	ground wire
3	ADJ	output	Backlight Brightness Control
4	EN	output	Backlight Enable Control
5	12V	power supply	12V output
6	12V	power supply	12V output

7. LVDS Interface



General LVDS interface definition, support single/dual, 6/8/10 bit 1080P LVDS screen. The screen voltage can be selected through the jumper cap, and can choose to support 3.3V/5V/12V screen power supply.

In order to avoid burning the board and screen, please pay attention to the following:


1. Please confirm whether the power supply voltage of the screen specification book is correct, and whether the corresponding power supply of the board can meet the maximum working current of the screen.
2. Please use a multimeter to confirm whether the power supply selected by the jumper cap is correct.
3. When connecting the screen cable of the 6/8-bit LVDS screen, it should be installed close to the pin1 end.

No.	Definition	Attributes	Description
1	VCC	power supply	3.3V/5V/12V optional output
2	VCC		
3	VCC		
4	GND	ground wire	ground wire
5	GND	ground wire	ground wire
6	GND	ground wire	ground wire
7	D0N	output	Odd 0-
8	D0P	output	Odd 0+
9	D1N	output	Odd 1-
10	D1P	output	Odd 1+

11	D2N	output	Odd 2-
12	D2P	output	Odd 2+
13	GND	ground wire	ground wire
14	GND	ground wire	ground wire
15	CKN	output	Odd Clock-
16	CKP	output	Odd Clock+
17	D3N	output	Odd 3-
18	D3P	output	Odd 3+
19	D5N	output	Even 0-
20	D5P	output	Even 0+
21	D6N	output	Even 1-
22	D6P	output	Even 1+
23	D7N	output	Even 2-
24	D7P	output	Even 2+
25	GND	ground wire	ground wire
26	GND	ground wire	ground wire
27	CKN	output	Even Clock-
28	CKP	output	Even Clock+
29	D8N	output	Even 3-
30	D8P	output	Even 3+

Note: Do not operate with power on, Do not hot swap


8. MIPI_DSI Interface



No.	Definition	Attributes	Description
1	LED+	Output	LED+
2	LED+	Output	LED+
3	NC	Null	NC
4	NC	Null	NC
5	NC	Null	NC
6	NC	Null	NC
7	NC	Null	NC
8	NC	Null	NC
9	LED-	Output	LED-
10	LED-	Output	LED-
11	GND	GND	GND

12	NC	Null	NC
13	NC	Null	NC
14	NC	Null	NC
15	NC	Null	NC
16	GND	GND	GND
17	NC	Null	NC
18	NC	Null	NC
19	GND	GND	GND
20	RXE3+	Output	MIPI 3+ Signal
21	RXE3-	Output	MIPI 3- Signal
22	GND	GND	GND
23	RXE2+	Output	MIPI 2+ Signal
24	RXE2-	Output	MIPI 2- Signal
25	GND	GND	GND
26	RXECLK+	Output	MIPI CLK + Signal
27	RXECLK-	Output	MIPI CLK - Signal
28	GND	GND	GND
29	RXE1+	Output	MIPI 1 + Signal
30	RXE1-	Output	MIPI 1 - Signal
31	GND	GND	GND
32	RXE0+	Output	MIPI 0 + Signal
33	RXE0-	Output	MIPI 0 - Signal
34	GND	GND	GND
35	NC	Null	NC
36	RST	Output	Reset
37	GND	GND	GND
38	VCC	Output	power supply
39	VCC	Output	power supply
40	NC	Null	NC

9. USB Interface

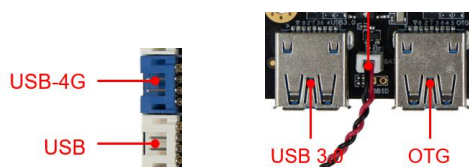

The board has 2 USB standard interfaces and 4 USB pins, one of which is shared with the 4G module.

NO.	Definition	Attributes	Description
1	5V	power supply	5Voutput
2	DM	input/output	DM

3	DP	input/output	DP
4	GND	ground wire	ground wire

10. SPK Interface (Amplifier)




NO.	Definition	Attributes	Description
1	SPKR+	output	right channel+
2	SPKR-	output	right channel-
3	SPKL-	output	left channel-
4	SPKL+	output	left channel+

11. GPIO Interface (Extension) and Definition



NO.	Definition	Attributes	Description
1	GND	ground wire	ground wire
2	GPIO1	IO1	IO1
3	GPIO2	IO2	IO2
4	GPIO3	IO3	IO3
5	GPIO4	IO4	IO4
6	GPIO5	IO5	IO5
7	3V3	power supply	3.3V output

12. UART (Serial port) Interface

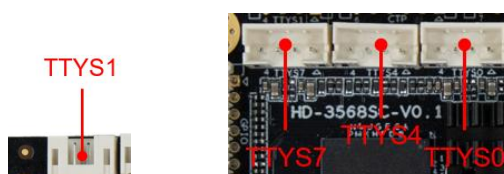

The board leads to two sets of ordinary UART serial ports, which can support common UART serial port devices on the market.

Precautions:

1. Whether the serial port voltage matches. It cannot be directly connected to RS232, RS485 serial devices.
2. Whether the connection of TX and RX is correct.

No.	Definition	Attributes	Description
1	3v3	power supply	3.3Voutput
2	TX	output	TX
3	RX	input	RX
4	GND	ground wire	ground wire


1. TTYS0/ TTYS7 can adjust RS485 through hardware
2. TTYS 1/ TTYS4 can adjust RS232 through hardware

13. DEBUG Interface



NO.	Definition	Attributes	Description
1	3V3	power supply	3.3Voutput
2	TX	output	TX
3	RX	input	RX
4	GND	ground wire	ground wire

14. CTP Interface



NO.	Definition	Attributes	Description
1	3V3	power supply	3.3V output
2	SCL	input/output	I2C clock
3	SDA	input/output	I2C data
4	INT	input/output	to interrupt
5	RST	input/output	reset
6	GND	ground wire	ground wire

15. POE Interface



NO.	Definition	Attributes	Description
1	V1	CT1	Transformer Center 1
2	V2	CT2	Transformer Center 2
3	B1	CT3	Transformer Center 3
4	B2	CT4	Transformer Center 4

16. KEY Interface



NO.	Definition	Attributes	Description
1	PWRON	Power switch	Power switch, which can be connected to an external button to control the switch
2	RST	Reset signal	Reset signal interface, reserved
3	KEY	ADC	ADC reserve
4	GND	ground wire	ground wire

17. MCU Interface




NO.	Definition	Attributes	Description
1	3V3	power supply	3.3V output
2	TX	output	TX
3	RX	input	RX
4	GND	ground wire	ground wire

18. Other Interfaces

storage interface	TF card	Data storage, maximum support 256G
	USB	HOST interface, support data storage, data import, USB mouse keyboard, camera, touch screen, etc.
Ethernet interface	RJ45 interface	Support 100M wired network
HDMI OUT interface	HDMI-A	Support HDMI output, up to 4K@60Hz
HDMI IN interface	Serial port	Support HDMI input, up to 4K@30Hz

Chapter III Communication Methods

I . Wi-Fi Update Program

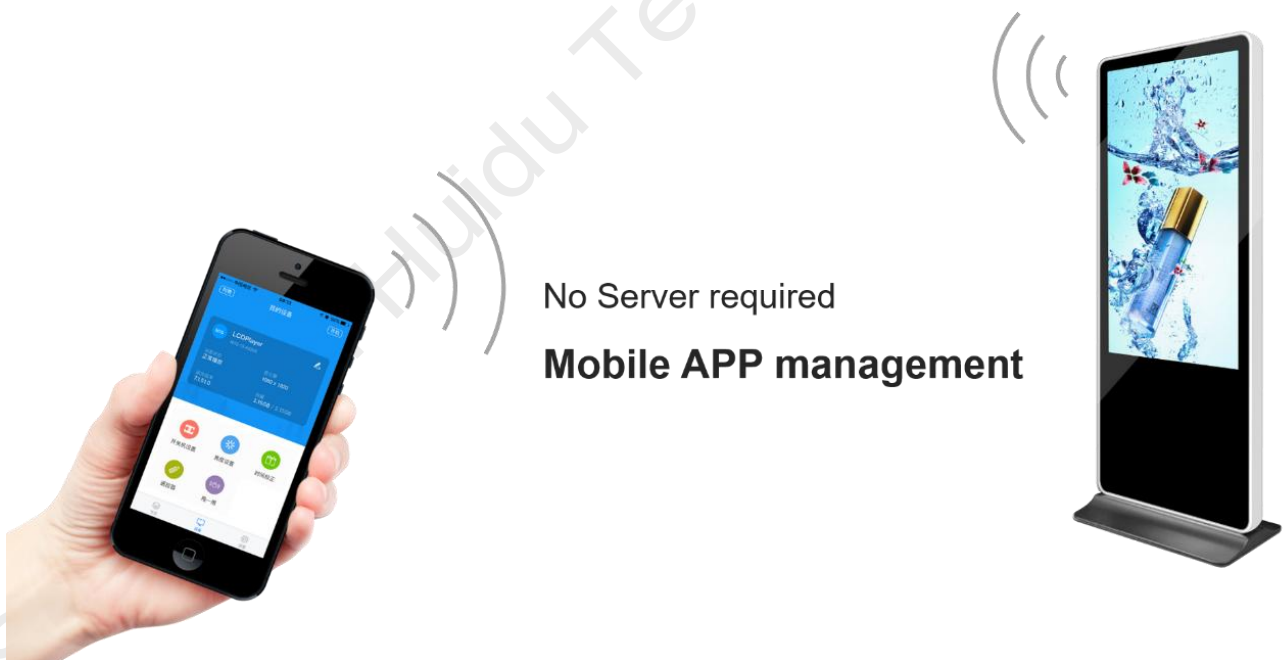


II. U-disk Update Program



U-disk update programs

Support Interstitial & memory expansion



III. TF Card Update Program



TF card update programs

Support Interstitial & memory expansion




IV. Ethernet Cable to Update

LAN or Internet

Network cable connection

LAN & Internet integrated management



V. Internet Update

Internet remote management


Anytime & anywhere operation available



4G/LAN/Wi-Fi



Chapter IV Appendix: Product Appearance

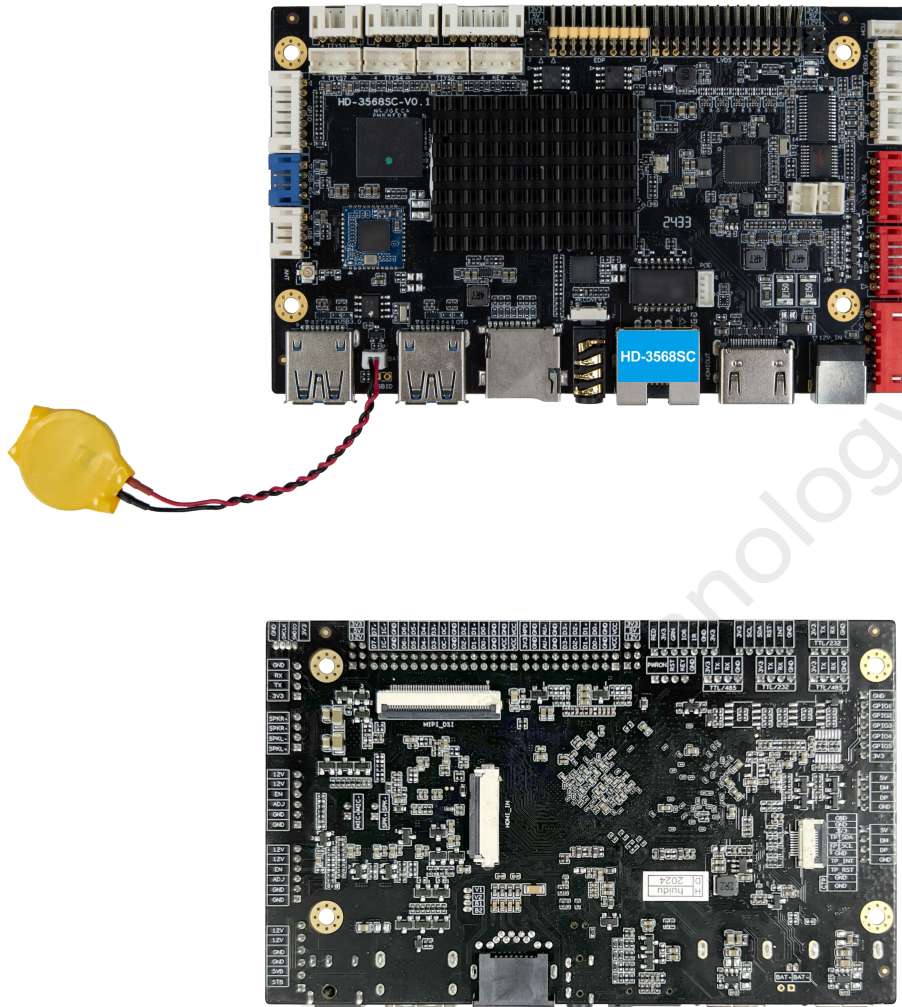

Note:

1. There are certain differences between the actual product and the picture in the specification, please refer to the actual product, if you have any questions, please contact relevant technical or business consultation.

2. Do not operate with power on, Do not hot swap.