



PRODUCT SPECIFICATION

LED Display Asynchronous Control System

HD-C08L

V1.1

Update history:

Release version	Release time	Release Notes
V1.1	Sep. 13th, 2025	Delete "certificate of conformity" from the packaging information
V1.0	March 18th, 2024	First release

1. Product Overview

HD-C08L is a new generation LED multimedia playback card that integrates 8 HUB75E interfaces, eliminating the need for a computer as a video signal source; It supports the playback of videos, pictures, Gif animations, texts, WPS documents, tables, clocks, timings and other program contents; It supports 60Hz frame rate output, smooth word movement and remote control of power supply and other functions.

C08L comes standard with Wi-Fi and supports mobile APP - "LedArt" wireless control; It supports access to the "XiaoHui Cloud" platform to easily realize remote cluster management on the Internet; It supports USB interface to update programs; It supports external various environmental monitoring sensors, achieving real-time viewing of environmental monitoring data; C08L is widely used in smart commercial displays and smart city fields, such as light pole screens, door screens, vehicle screens and other advertising and display fields.

2. Product Features

Input:

1. Support 1 channel 100M communication network port, used for debugging parameters, sending programs and accessing the Internet;
2. Support 1 channel USB communication interface, which can be used to update programs and expand capacity;
3. Support 1 channel dedicated interface for temperature sensor, 1 channel dedicated interface for GPS sensor and 1 channel universal sensor input interface.


Output:

1. The maximum control range is 196,000 pixels, the maximum width is 2048 pixels, or the maximum height is 1024 pixels;
2. Onboard 8 sets HUB75E interfaces;
3. 1 channel TRS 3.5mm standard two-channel audio output.

Functions:



1. Comes standard with 2.4GHz Wi-Fi and supports mobile APP wireless control (supports Wi-Fi-AP, Wi-Fi-STA mode);
2. Onboard 1-channel relay can remotely control the power supply;
3. Supports 2-channel video window playback (supports up to 2 channels of 1080P);
4. Support 4G access to XiaoHui Cloud platform to realize remote management on the Internet (optional);
5. Support UART communication;
6. Supports 1 channel RS-232 or RS-485 communication (optional).
7. Support for Chinese and English voice broadcasting function (optional).

3. Interface Description

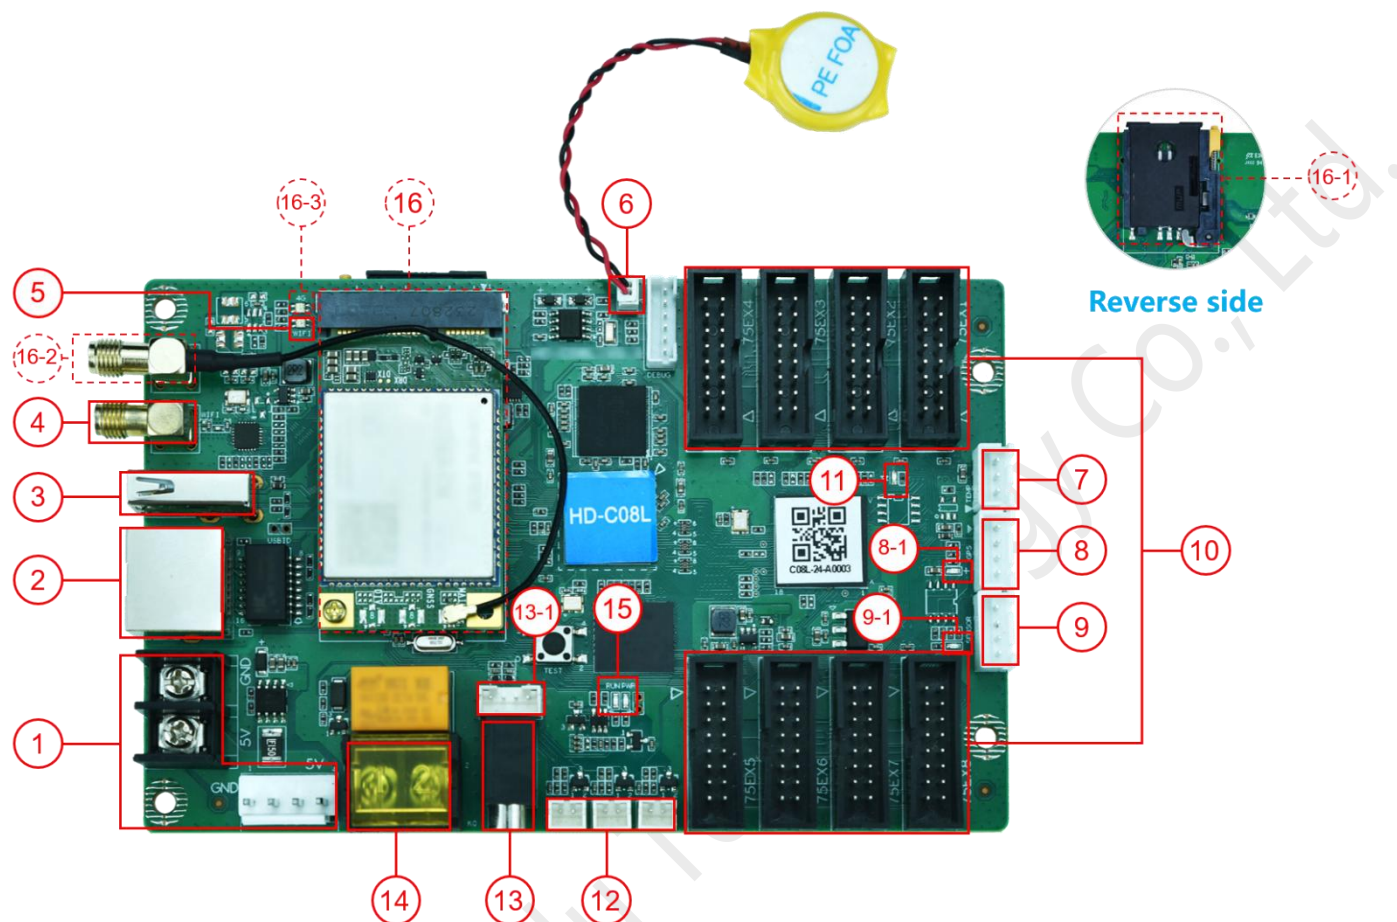


Serial number	Name	Description
1	Power input terminal	DC 5V
2	Ethernet network port	100M input network port communication, connect to computer to debug and publish programs, used to access LAN or Internet
3	USB	Used to update programs or expand capacity
4	Wi-Fi antenna	Connect Wi-Fi antenna to enhance wireless signal
5	Wi-Fi indicator light	AP mode: ①The AP mode is normal and the green light flashes; ②The module cannot be detected and the light does not light up;

		③Cannot connect to the hotspot and the red light flashes; STA mode: ①STA mode is normal and the green light is always on; ②The bridge cannot connect to the Wi-Fi hotspot and the red light is always on; ③Unable to connect to the server, the yellow light is always on.
6	Battery interface	Connect the 2PIN RTC battery
7	TEMP interface	Connect a temperature sensor to monitor the surrounding environment temperature in real time
8	GPS interface	① When detecting that there is no GPS signal, the light does not light up; ②When the GPS star search number < 4, the green light flashes; ③When the GPS star search number >= 4, the green light is always on.
8-1	GPS indicator light	Connect to GPS module for positioning and time adjustment
9	Sensor interface	External temperature, humidity, brightness, wind speed, wind direction, noise, PM2.5, PM10, CO ₂ and other sensors
9-1	Sensor indicator light	The sensor is connected normally, and the indicator light is flashing
10	HUB75E interface	Connect HUB75 (B/D/E) interface module
11	Display indicator light	If the green light flashes, the FPGA system is running normally; if the green light is on or off, the system is running abnormally.
12	3 sets of CTRL	Switching quantity detection, detecting 12V level input, controlling on/off screen

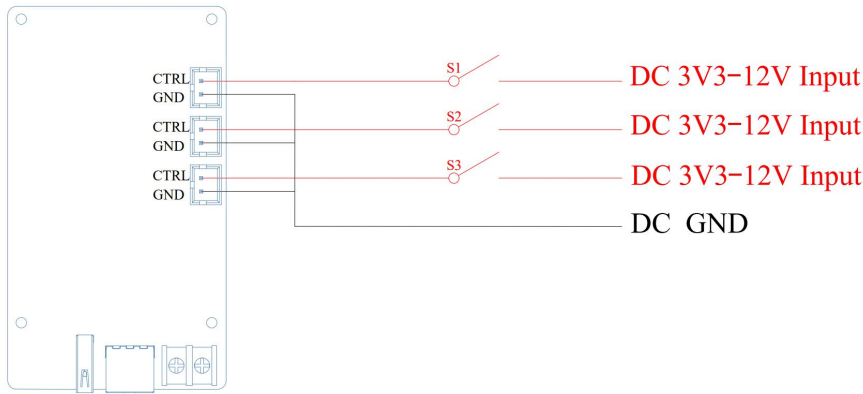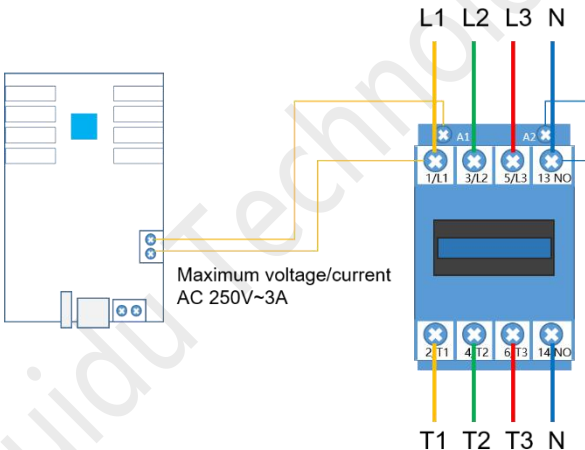		
13	TRS Audio output	TRS 3.5mm standard two-channel audio output port
14	Relay	Relay on/off, supports maximum load: AC 250V~3A or DC 30V-3A The connection method is as follows: 
15	System indicator light	PWR: Power indicator light, green light is always on, power input is normal RUN: System running light. If the green light flashes, the system is running normally; if the green light is always on or off, the system is running abnormally.
16	PCIE-4G socket	4G module socket (optional function, installed with 4G antenna by default)
16-1	Standard SIM card slot	Used to install 4G data card and provide networking function (optional, supports optional eSIM card)

16-2	4G antenna installation port	External 4G antenna to enhance 4G signal
16-3	4G communication indicator light	①The green light is always on, and the connection to the cloud server is successful; ②The yellow light is always on and cannot connect to the cloud service; ③The red light is always on, there is no signal or the SIM is in arrears or cannot dial; ④The red light flashes and the SIM cannot be detected; ⑤The light does not light up and the module cannot be detected.

4. Dimensions

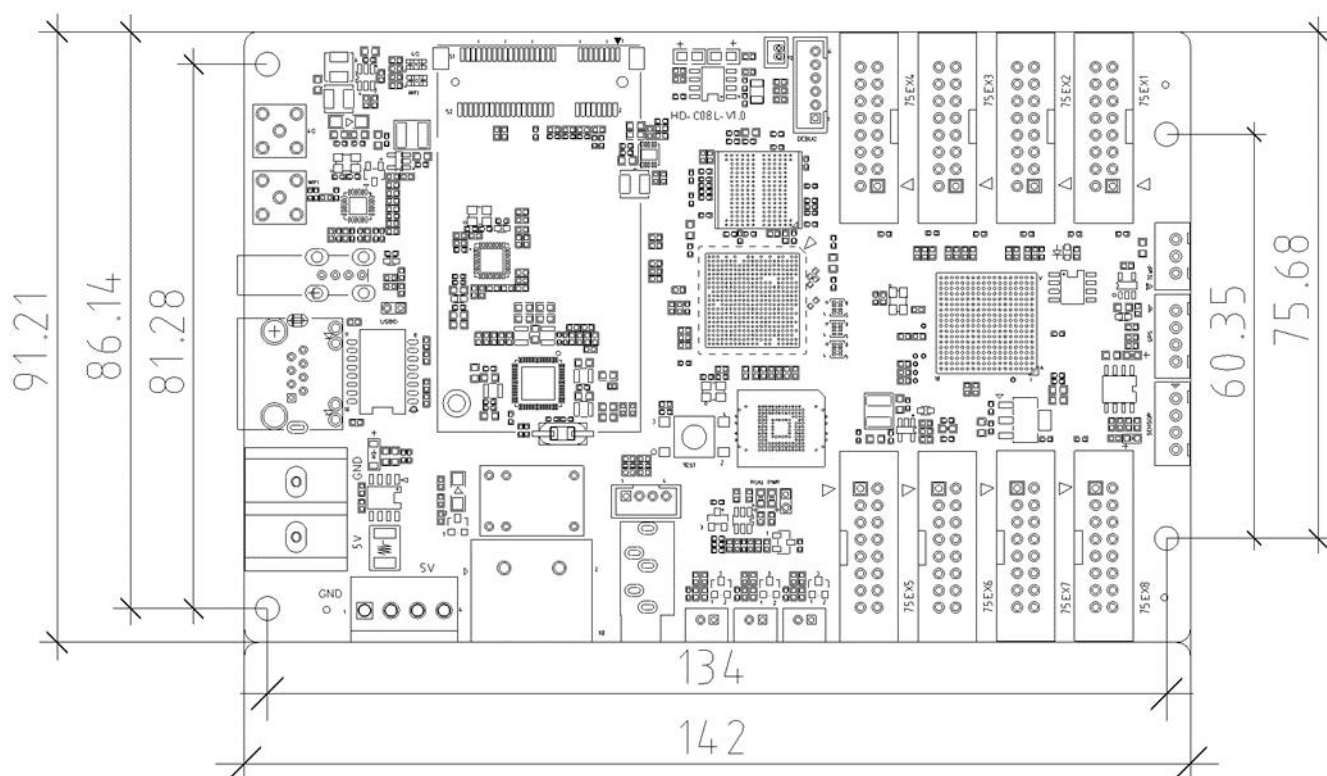

Tolerance: ± 0.3 Unit: mm

5. Product Specifications

Media Type:

Program schedule	Supports sequential playback of multiple programs, timed playback, program insertion, and multi-screen synchronization
Program partition	Support any partition of program window
Video format	AVI, WMV, MPG, RM/RMVB, VOB, MP4, FLV and other common video formats Supports up to 2 channels of 1080 video playback at the same time
Image Format	BMP, GIF, JPG, JPEG, PNG, PBM, PGM, PPM and other common image formats
Audio format	MPEG-1 Layer III, AAC, etc.
Text display	Single line text, static text, multi-line text, animated words, WPS, etc.
Clock display	RTC real-time clock display and management
U disk	Plug and play


The parameter:

Electrical parameters	Input power	DC 5V (4.6V~5.5V)
	Maximum power consumption	8W
Hardware parameters	Hardware performance	1.5GHz, Quad-core CPU, Mali-G31GPU Support 1080p@60fps hard decoding playback Support 1080p@30fps hardware encoding
Storage	Internal storage	4GB (2G available)
Storage environment	Temperature	-40℃ ~ 80℃
	Humidity	0%RH ~ 80%RH (no condensation)
Working environment	Temperature	-40℃ ~ 80℃
	Humidity	0%RH ~ 80%RH (no condensation)


Packaging Information	Checklist: 1×C08L 1×Wi-Fi antenna Note: 4G antenna comes with 4G module optional 1PCS
Size	142mm×91.2mm
Net weight	0.114KG
Protection level	The bare board is not waterproof, prevent water from dripping into the product, and do not get the product wet or rinsed
System software	Linux4.4 operating system software FPGA software

6. Way of Communication

1. Stand-alone control, supports Wi-Fi, network port direct connection, and USB interface for communication.

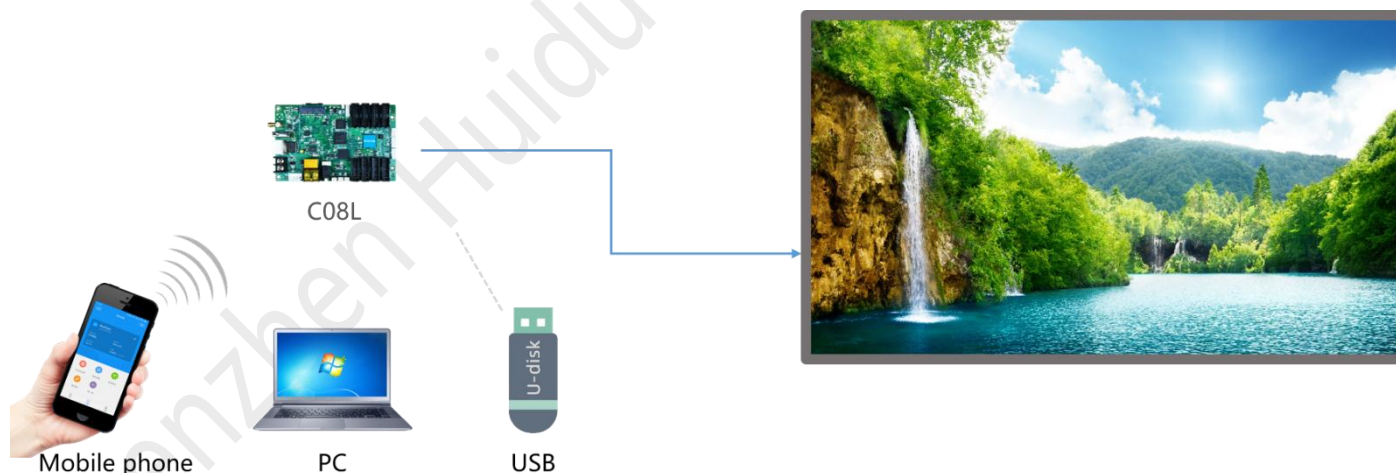

2. Cluster control, supports Internet remote control.

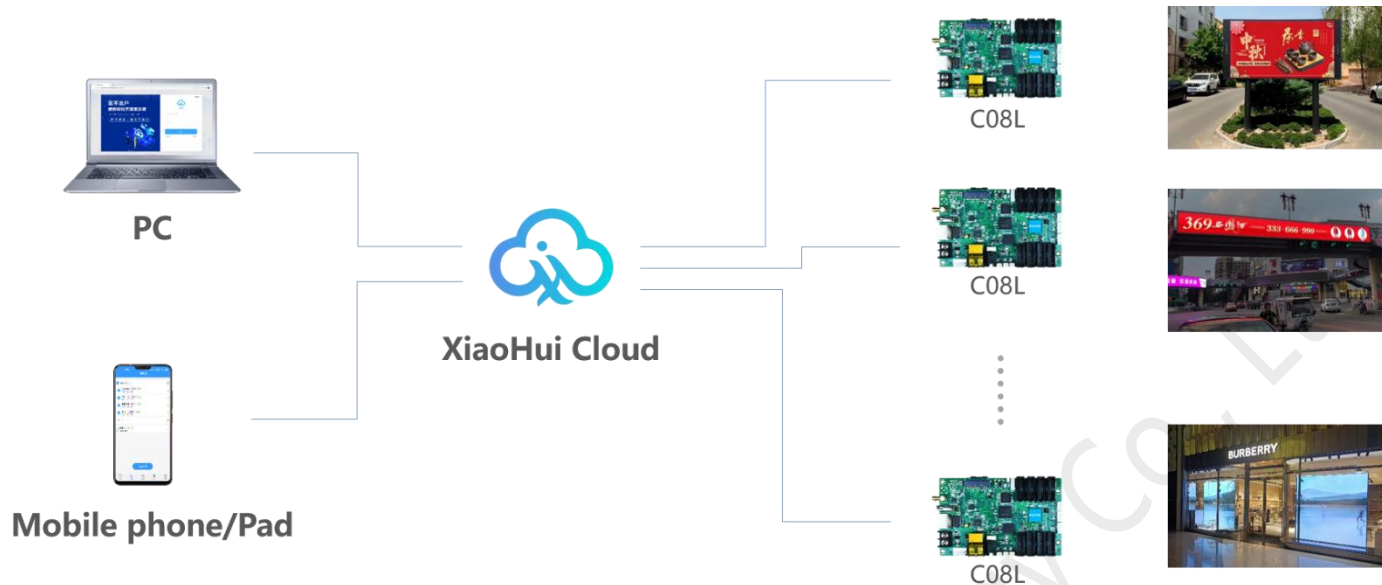

7. System supporting software

Software	Type	Description
HDPlayer	PC	LED display screen local management system, used for debugging, program editing, program publishing, etc.
XiaoHui Cloud	Web	Cloud based display screen information publishing system, which enables remote cluster management and information publishing of LED displays by logging in through a browser.
LedArt	Mobile Phone	Supports Android, iOS, and Harmony platforms, enabling control of LED displays and wireless program publishing.

8. Appearance



Standard version



Optional 4G version

Illustrate:

Welcome to choose Huidu Technology products. There may be differences between the product pictures in the specification and the actual appearance (such as interface caps, antenna installation, etc.). Please refer to the actual product. If you have any questions, please contact technical support or salesperson for confirmation.