



EA1000TiF

Indoor Fixed Installation Transparent LED Display

Feature:

1. 58% high transparency;
2. 500*1000mm lightweight cabinet;
3. Super High Brightness;
4. Includes quick lock for easy installation;
5. Stacking, hanging and fixed installations are supported.



Lightweight Cabinet

Die-cast aluminum cabinet, the weight is only 7.5kg/pcs

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY




500mm

1000mm

EA1000TIF SERIES

High Transparency

58% transparency, does not affect indoor vision.

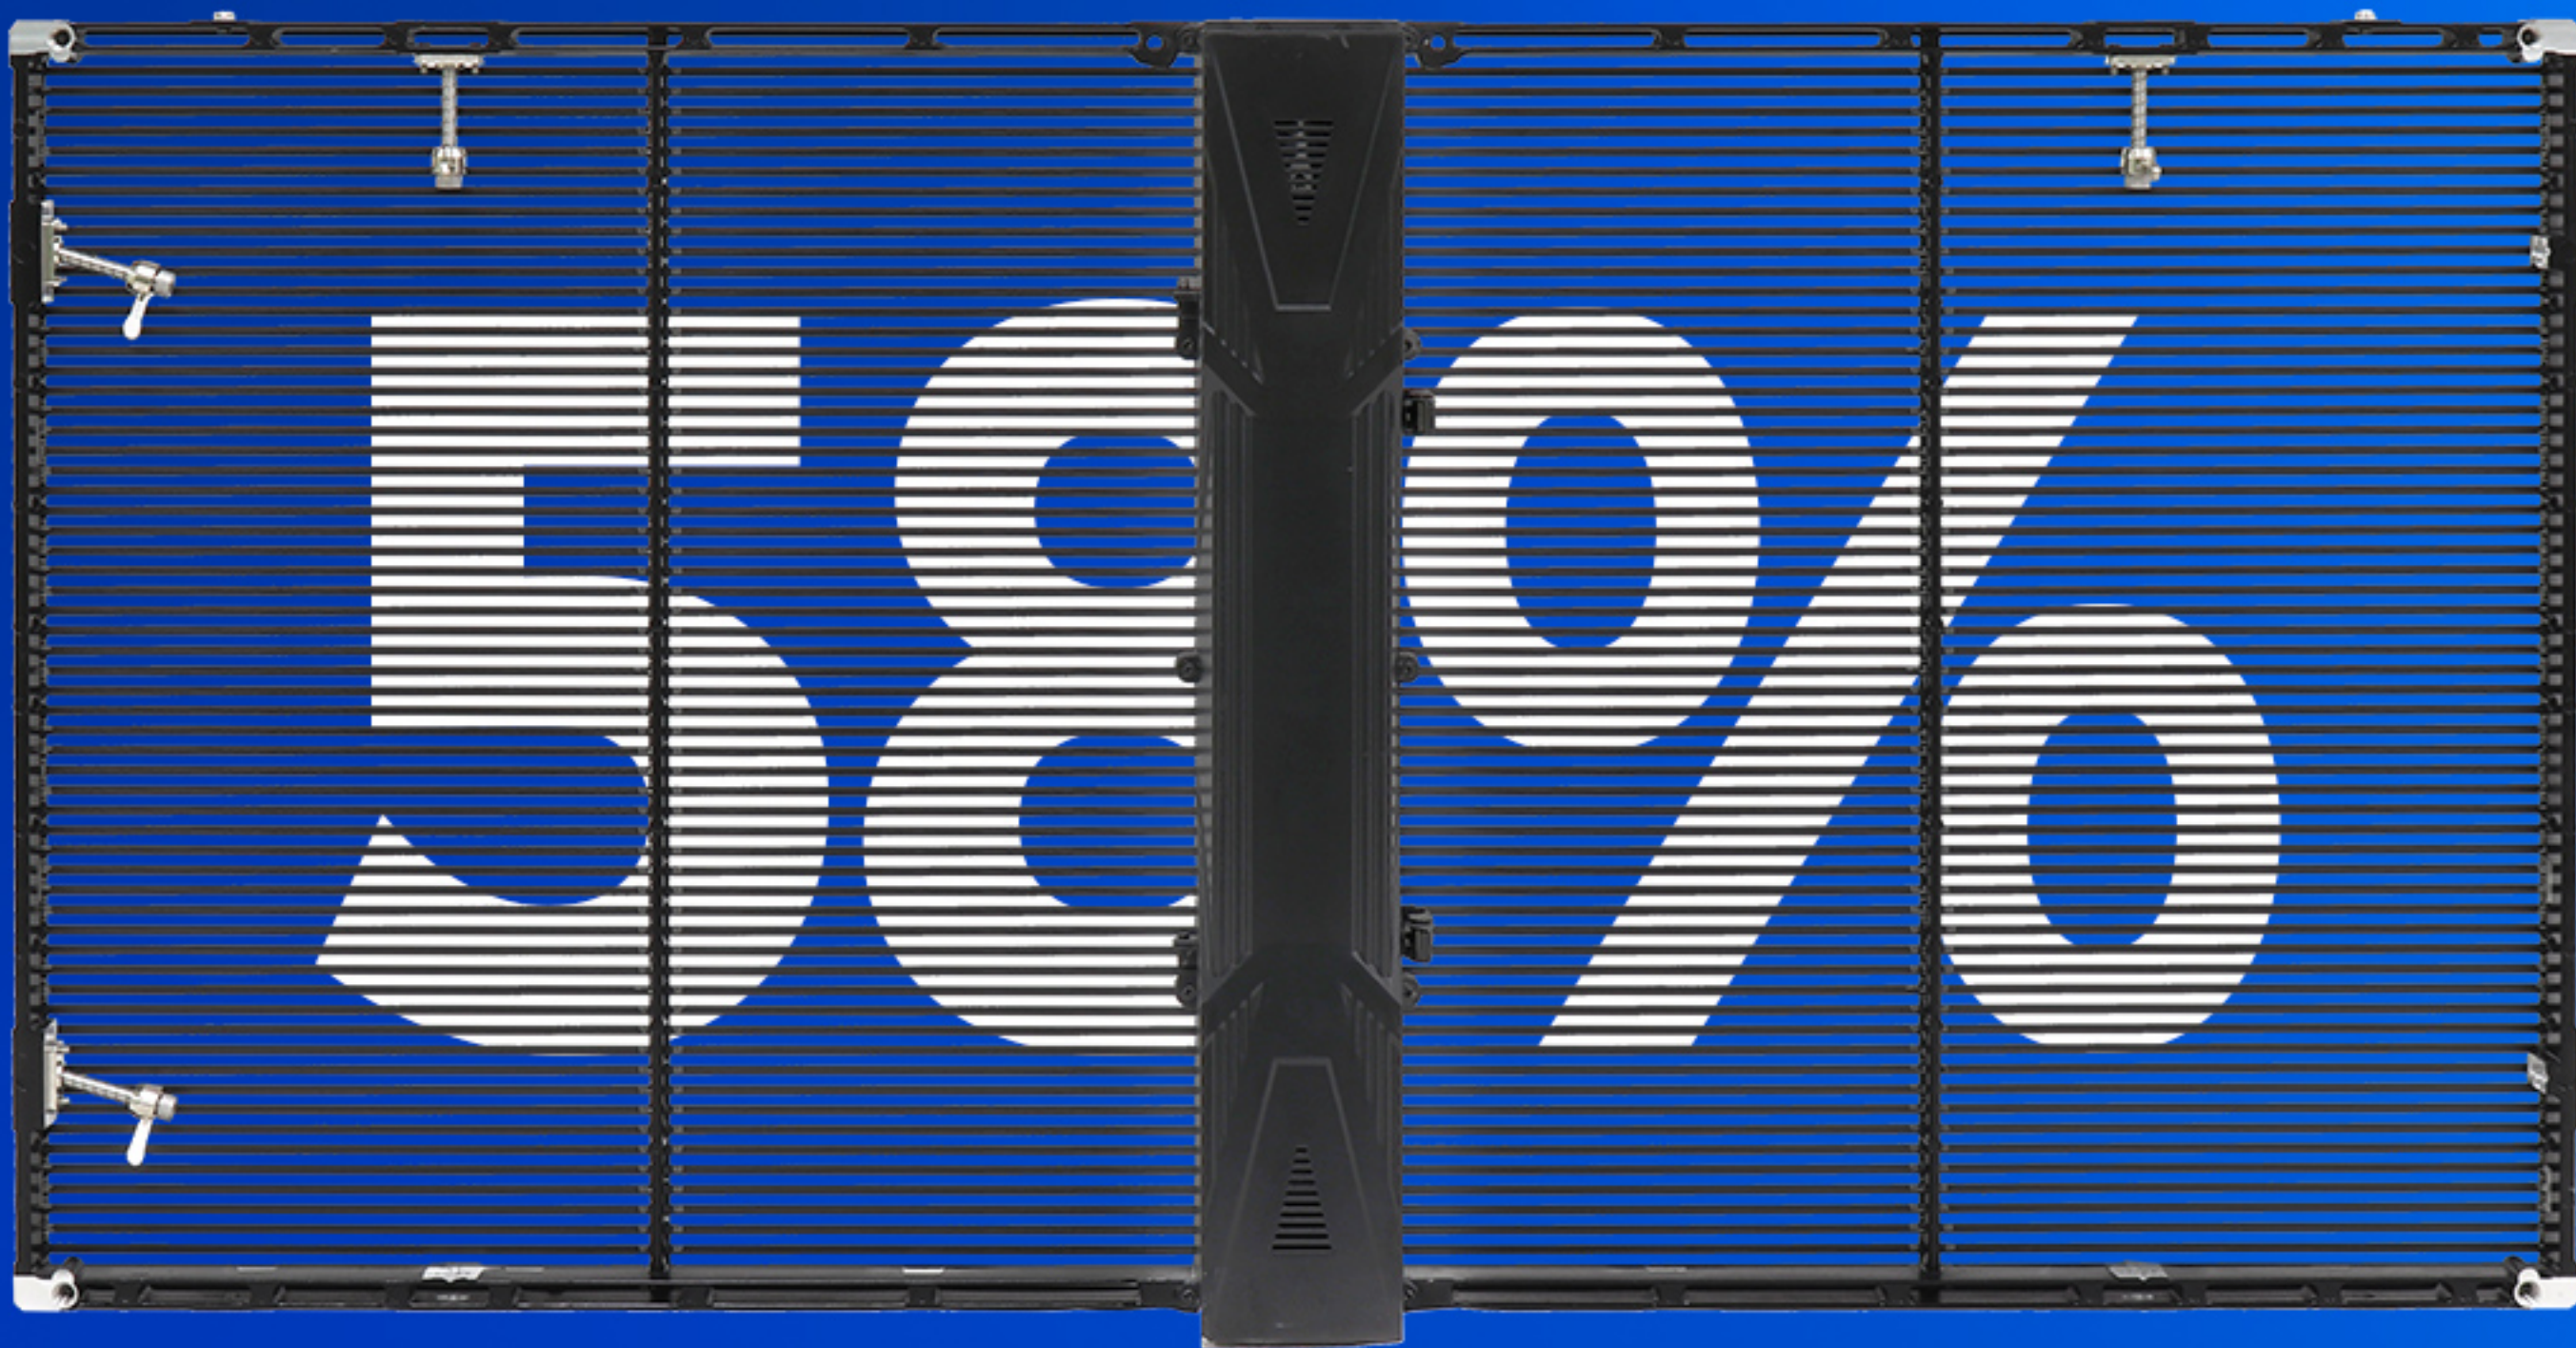

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

EA1000TIF SERIES

Power Box Design

Openable power box
for easy maintenance

EA1000TIF SERIES



Quick Lock Feature

Includes quick lock
for easy installation.


EA1000TIF SERIES



Easy to Install

Stacking, hanging and fixed installations are supported.


INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

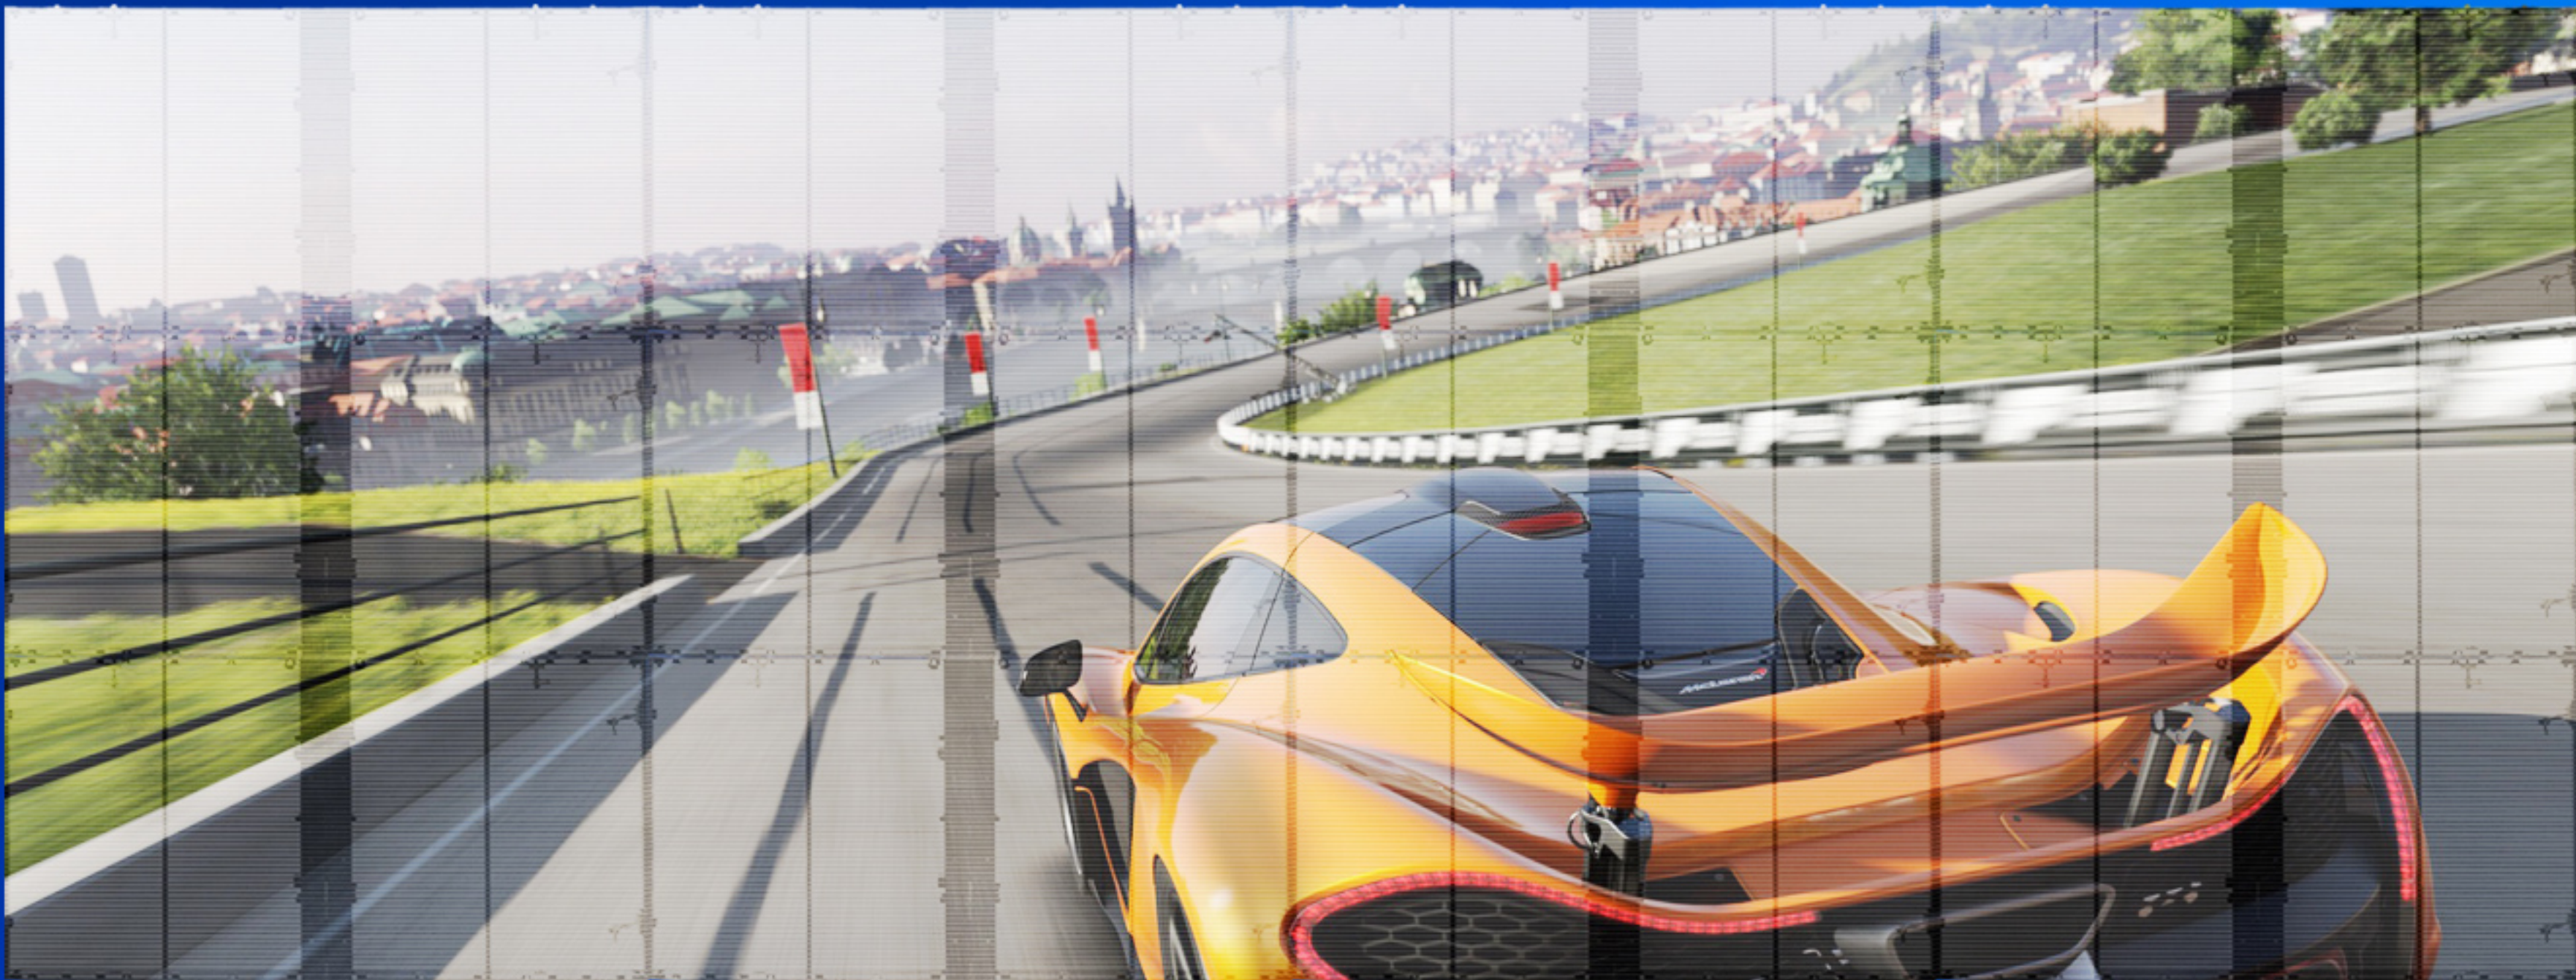

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

Installation Method

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

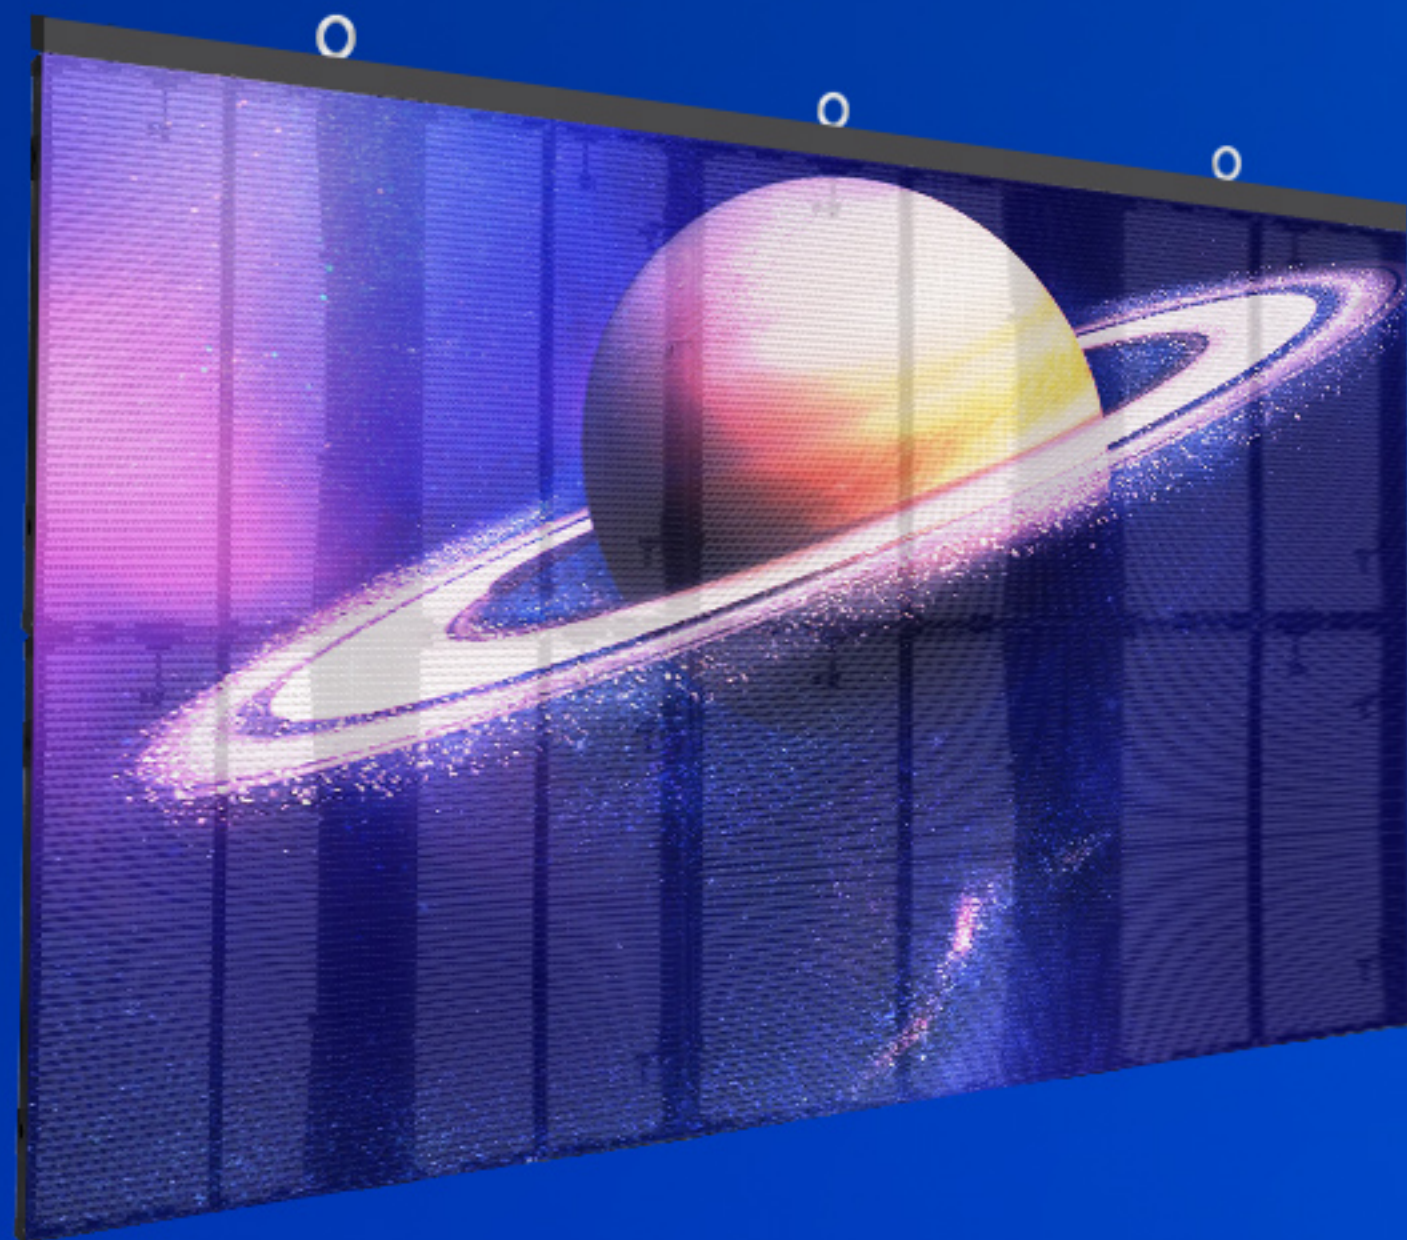

Hanging installation




Stack installation

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

Multiple Applications

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

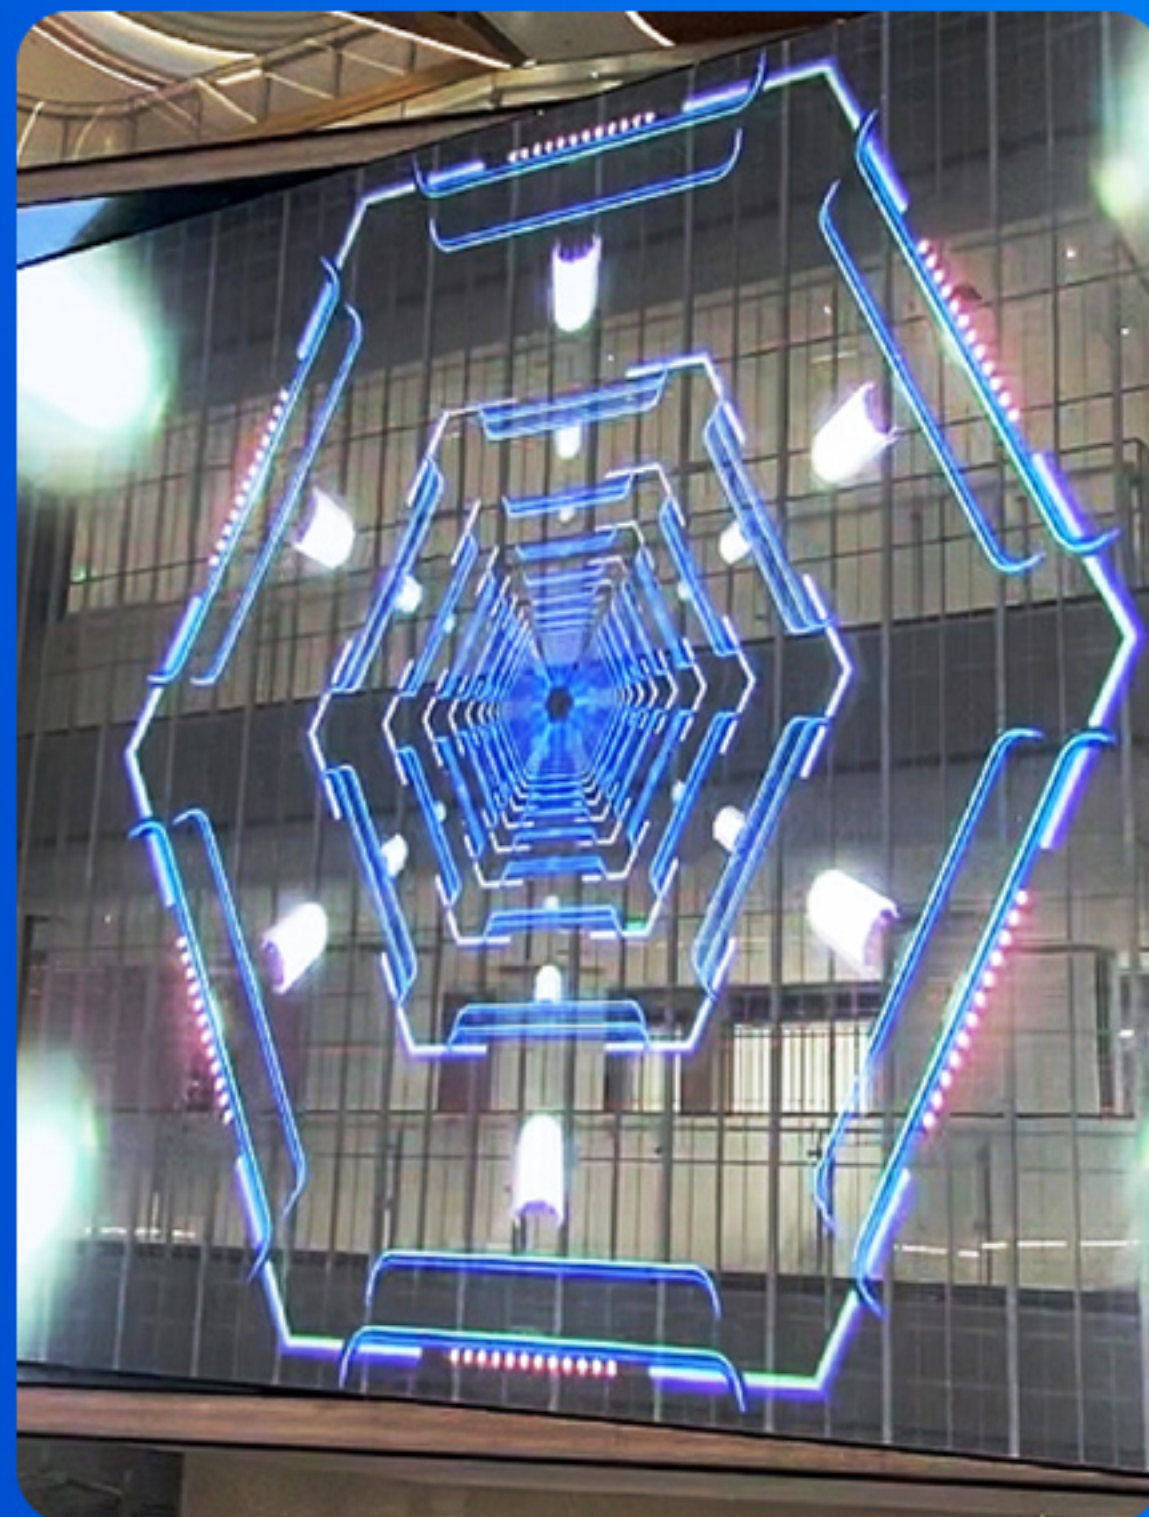

INDOOR FIXED INSTALLATION TRANSPARENT LED DISPLAY

Packing Method

(Refer to the packaging method)

Cabinet size(mm)	500*1000(L*H)
Packing Quantity	4pcs/carton
Package Size(mm)	1090*530*730(L*H*D)



EagerLED EA1000TiF Indoor Transparent LED Display Parameter

	Mode	EA1000TiF P2.6-5.2	EA1000TiF P2.8-5.6	EA1000TiF P3.91-7.82(8s)	EA1000TiF P3.91-7.82(16s)	EA1000TiF P7.82
Module Parameter	Pixel Pitch	2.6-5.2mm	2.8-5.6mm	3.91-7.82mm	3.91-7.82mm	7.82mm
	Pixel Configuration	SMD1921	SMD1921	SMD1921	SMD1921	SMD1921
	Driving Mode	1/12 duty	1/11 duty	1/8 duty	1/16 duty	1/4 duty
	Module Resolution(Pixel)	192(L) * 24(H)	176(L) * 22(H)	128(L) * 16(H)	128(L) * 16(H)	64(L) * 16(H)
	Module Size(mm)	500(L) * 125(H)	500(L) * 125(H)	500(L) * 125(H)	500(L) * 125(H)	500(L) * 125(H)
	Density	73,728pixels/m²	61,952pixels/m²	32,768pixels/m²	32,768pixels/m²	16,384pixels/m²
	Module Quantity in a Cabinet	2(L) * 4(H)	2(L) * 4(H)	2(L) * 4(H)	2(L) * 4(H)	2(L) * 4(H)
	Transparency Rate	≈50%	≈50%	≈53%	≈53%	≈58%
Cabinet Parameter	Cabinet Size(mm)	1000(L) * 500(H)	1000(L) * 500(H)	1000(L) * 500(H)	1000(L) * 500(H)	1000(L) * 500(H)
	Cabinet Weight	7.5 kg	7.5 kg	7.5 kg	7.5 kg	7.5 kg
	Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
	Cabinet Resolution(Pixel)	384(L) * 96(H)	252(L) * 88(H)	256(L) * 64(H)	256(L) * 64(H)	128(L) * 64(H)
	Protection Grade	IP33	IP33	IP33	IP33	IP33
Electricity Parameter	Brightness	4000 cd/m²	5000 cd/m²	4500 cd/m²	2500 cd/m²	4500 cd/m²
	Best Viewing Distance	≥2.6m	≥2.8m	≥3.91m	≥3.91m	≥7.82m
	Max. Power Consumption	800W/m²	800W/m²	800W/m²	800W/m²	800W/m²
	Avg. Power Consumption	220W/m²	220W/m²	220W/m²	220W/m²	220W/m²
	Screen Refresh Frequency	1920Hz				
	Frame Frequency	≥60Hz				
	Viewing Angle	140°(Horizontal); 140°(Vertical)				
	Gray Grade	14bits				
	Display Color	4.4 trillion colors				
	Brightness Adjustment	100 grades by software or automatically by sensor				
	Operation Power	AC100-240V 50-60Hz Switchable				
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI				
	Control Distance	100M (Ethernet cable);20KM (Optical fiber cable)				
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200				
	Color Temperature	5000—9300 adjustable				
	Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet				
	Working Temperature	-20 ~ +60 °C				
	Storage Temperature	-30 ~ +80 °C				
	Working Humidity	10% ~ 90% RH				
	Lifetime	100,000 hours				
	MTBF	>10,000 hours				
	Continuous Operating Time	≥72 hours				
	Out-of-Control Pixel Rate	≤0.01%				

EagerLED Leading LED Display Manufacturer



Whatsapp

+86 152 2013 3050



Website

eagerled.com



Youtube

@EagerLED



Tiktok

@eagerleddisplay