

EA1000TiR

Indoor Rental Transparent LED Display

Feature:

1. 70% high transparency;
2. 500*1000mm lightweight cabinet;
3. Super High Brightness;
4. Includes quick lock for easy installation;
5. Stacking, hanging and fixed installations are supported.




Lightweight Cabinet

Die-cast aluminum cabinet, the weight is only 7.5kg/pcs

INDOOR RENTAL TRANSPARENT LED DISPLAY

INDOOR RENTAL TRANSPARENT LED DISPLAY

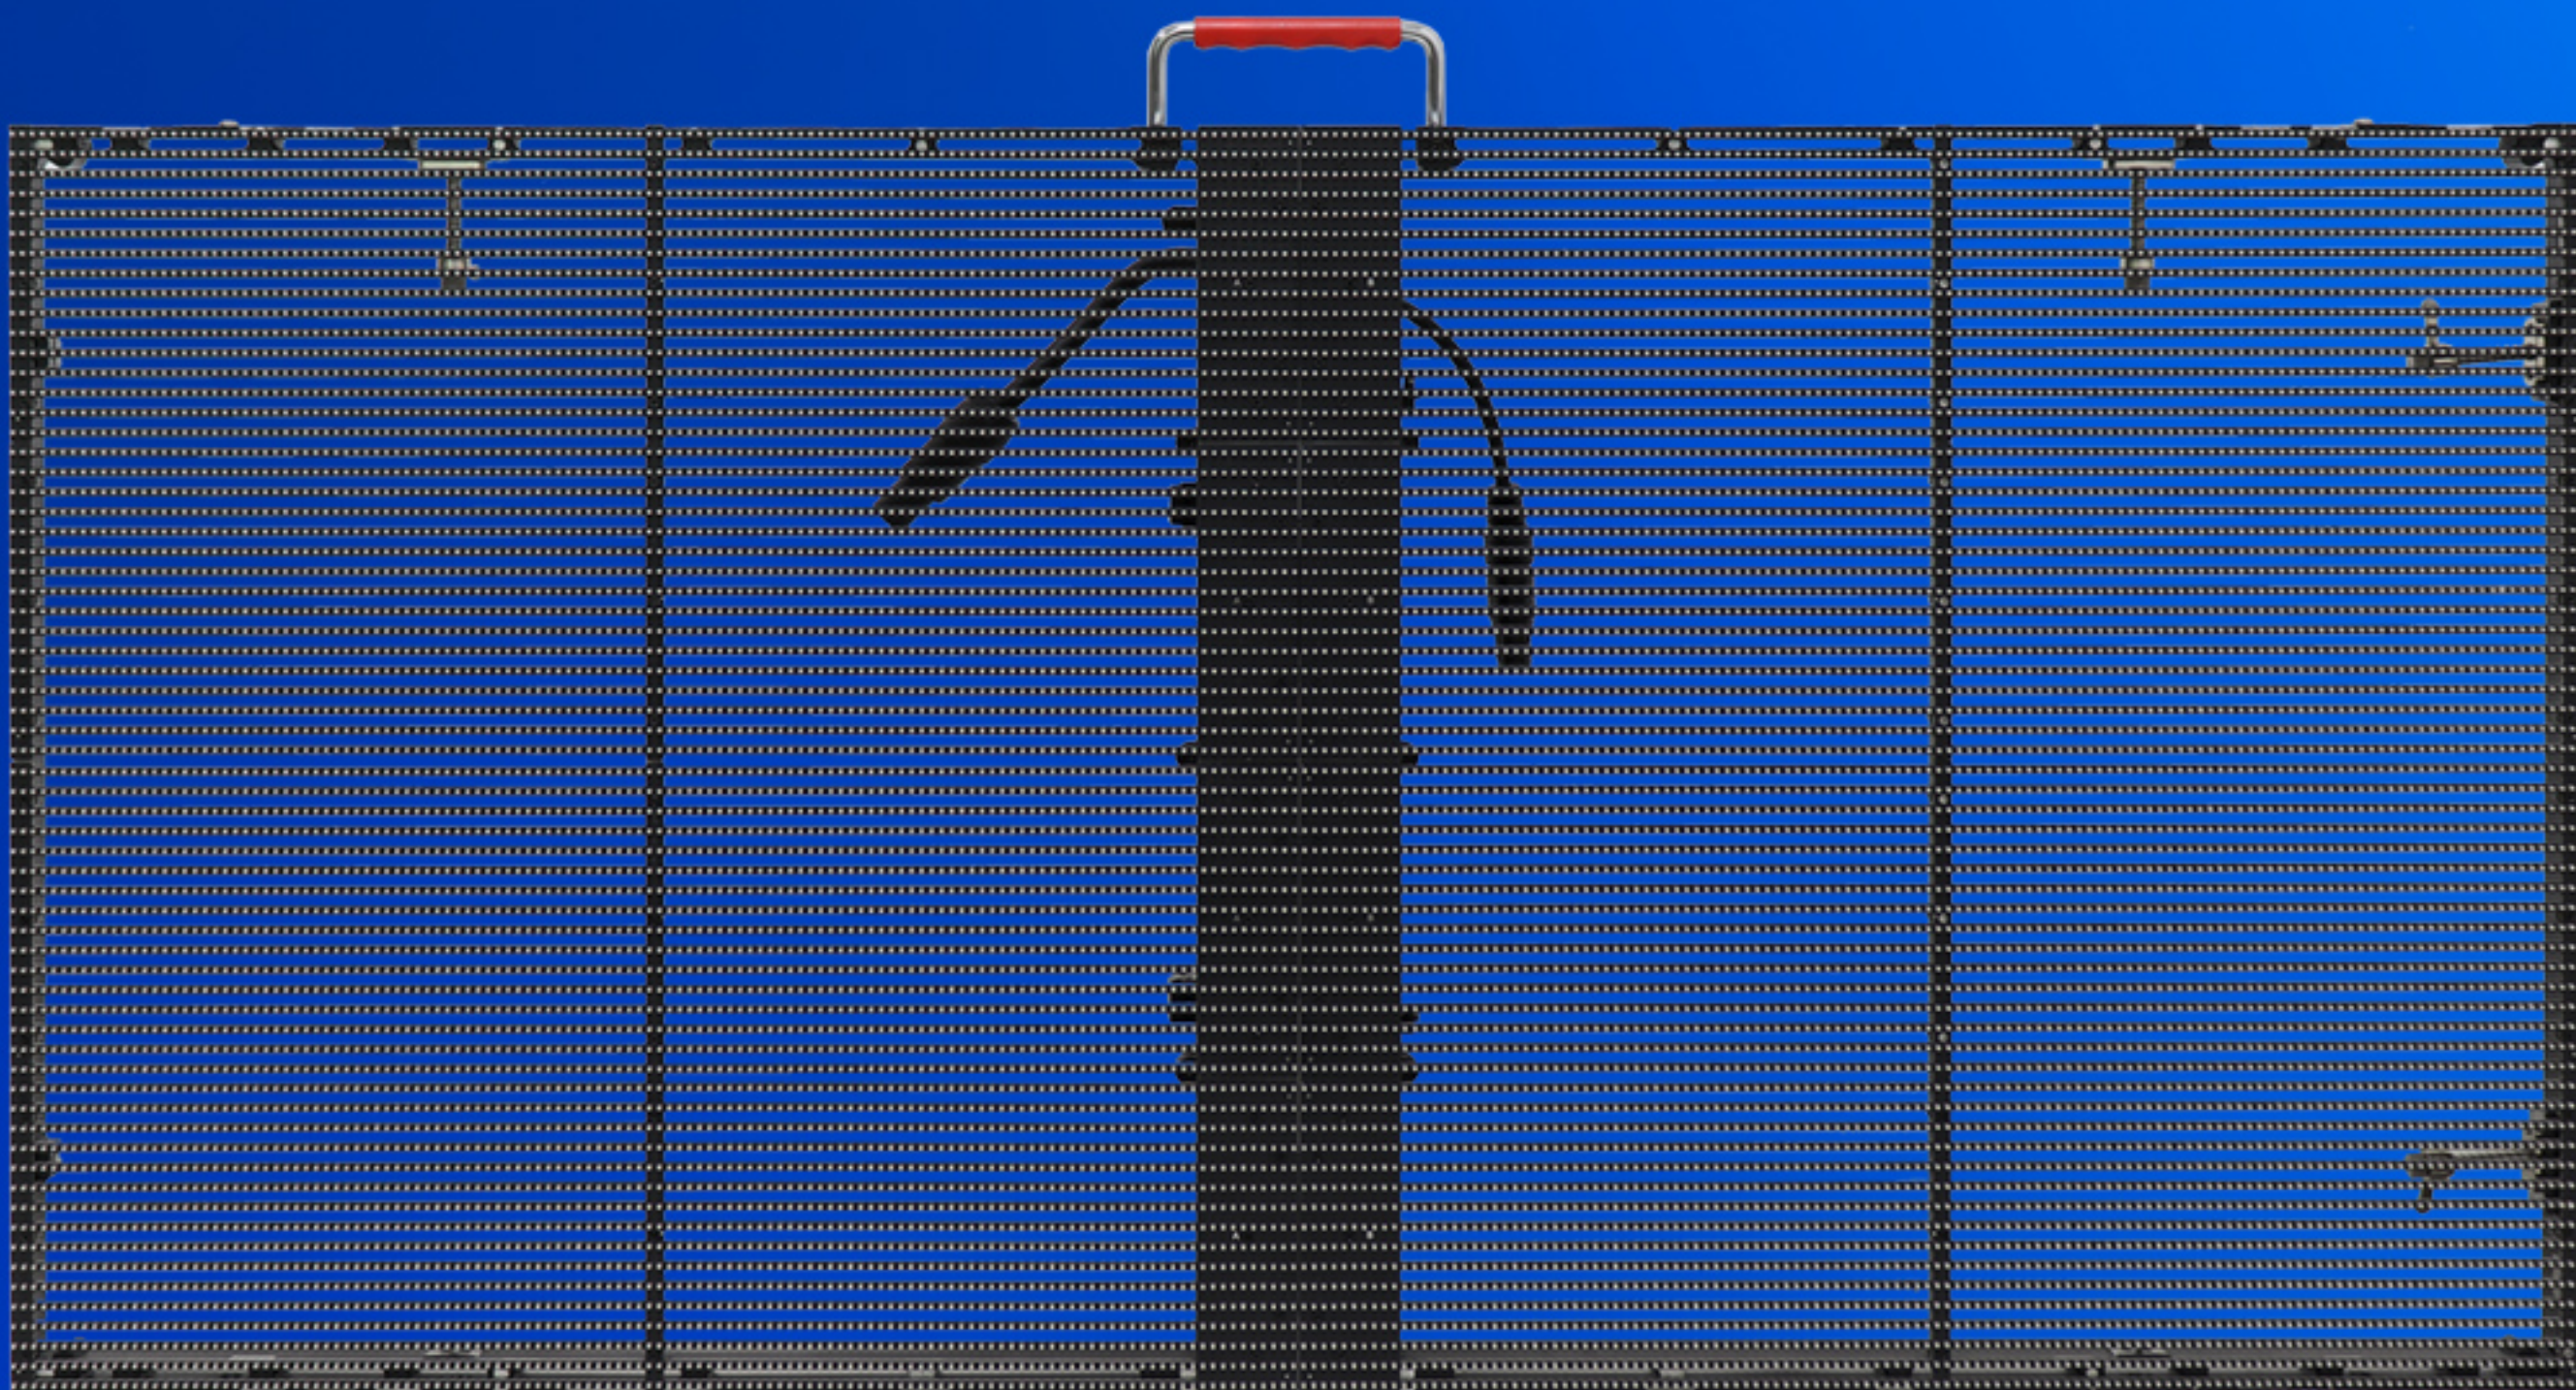

500mm

1000mm

EA1000TIR SERIES

70% High Transparency

70% transparency, does not affect indoor vision.



INDOOR RENTAL TRANSPARENT LED DISPLAY

INDOOR RENTAL TRANSPARENT LED DISPLAY

EA1000TIR SERIES

Power Box Design

Openable power box
for easy maintenance

EA1000TIR SERIES


EAGERLED
LED DISPLAY

INDOOR RENTAL TRANSPARENT LED DISPLAY



Quick Lock Feature

Includes quick lock
for easy installation.

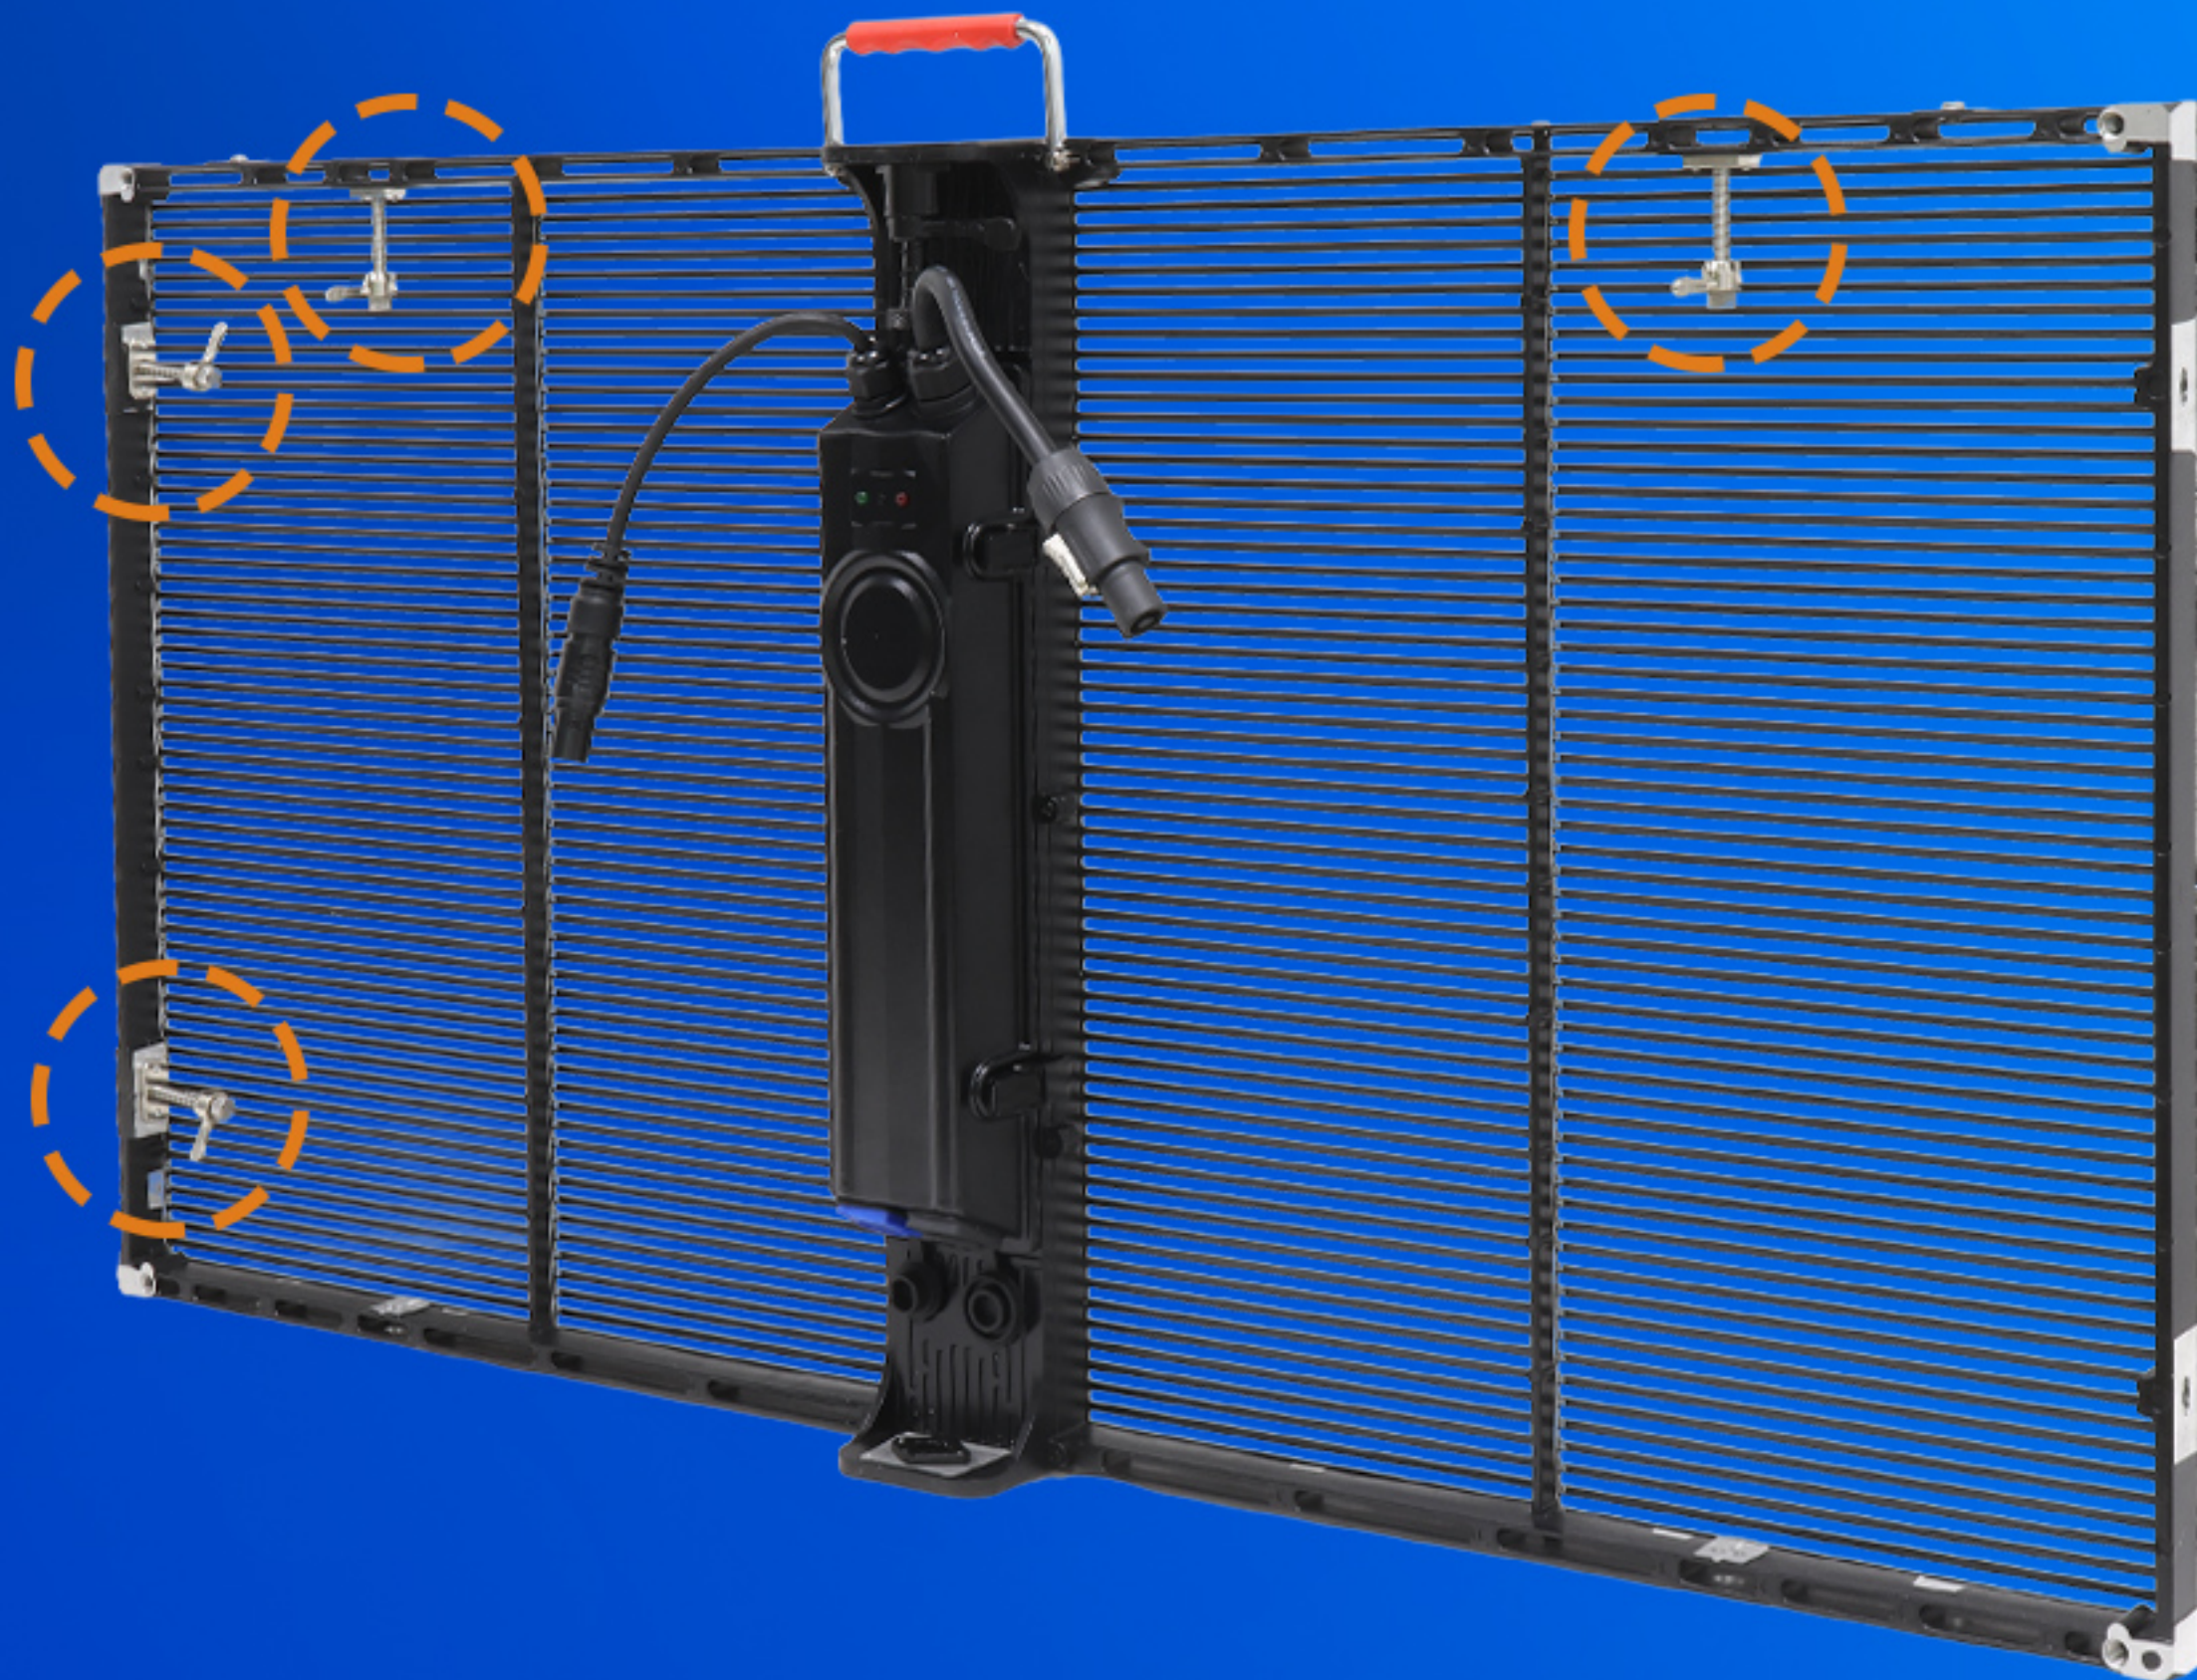

Easy to Install

Stacking, hanging and fixed installations are supported.

INDOOR RENTAL TRANSPARENT LED DISPLAY



INDOOR RENTAL TRANSPARENT LED DISPLAY

Installation Method

INDOOR RENTAL TRANSPARENT LED DISPLAY



Hanging installation




Stack installation

INDOOR RENTAL TRANSPARENT LED DISPLAY

Multiple Applications

INDOOR RENTAL TRANSPARENT LED DISPLAY

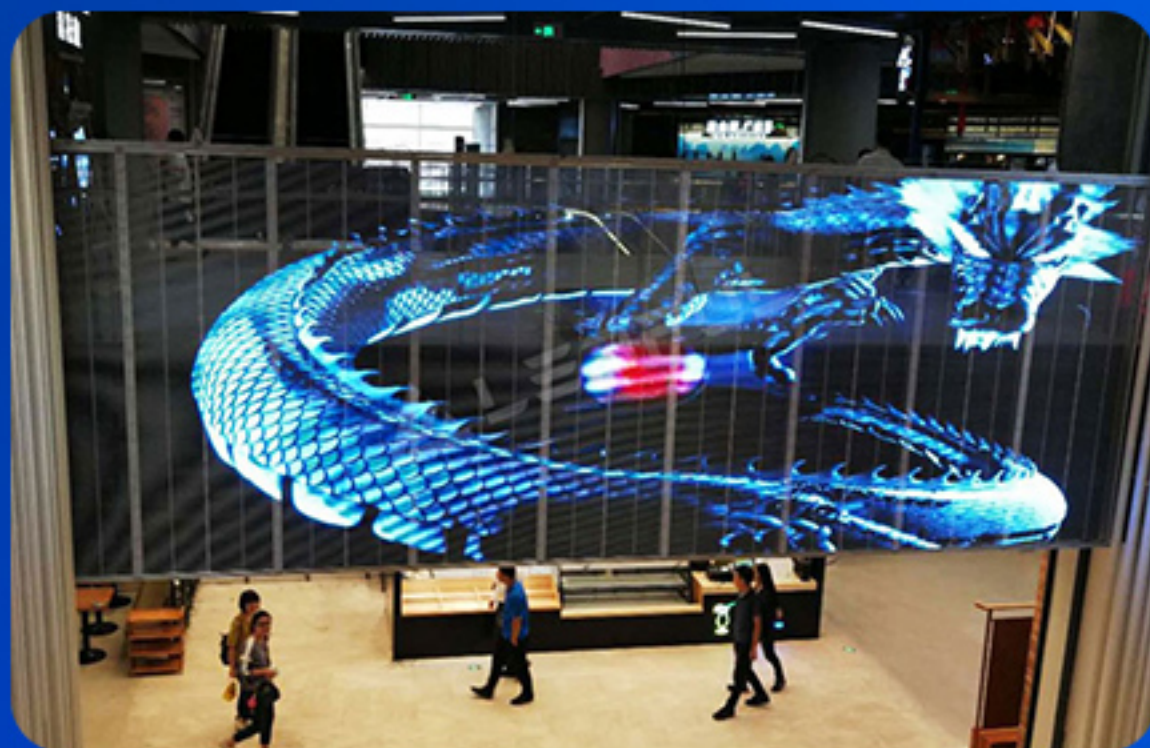

INDOOR RENTAL TRANSPARENT LED DISPLAY

Packing Method

(Refer to the packaging method)

Cabinet size(mm)	500*1000(L*H)
Packing Quantity	4pcs/carton
Package Size(mm)	1090*530*730(L*H*D)



Packing Method

(Refer to the packaging method)

Cabinet size(mm)	500*1000(L*H)
Packing Quantity	6pcs/carton
Package Size(mm)	1070*754*727(L*H*D)



EagerLED EA1000TiR Indoor Rental Transparent LED Display Parameter

	Mode	EA1000TiR P3.91-7.82(8s)	EA1000TiR P3.91-7.82(16s)	EA1000TiR P7.82
Module Parameter	Pixel Pitch	3.91-7.82mm	3.91-7.82mm	7.82mm
	Pixel Configuration	SMD1921	SMD1921	SMD1921
	Driving Mode	1/8 duty	1/16 duty	1/4 duty
	Module Resolution(Pixel)	128(L) * 16(H)	128(L) * 16(H)	64(L) * 16(H)
	Module Size(mm)	500(L) * 125(H)	500(L) * 125(H)	500(L) * 125(H)
	Density	32,768pixels/m²	32,768pixels/m²	16,384pixels/m²
	Module Quantity in a Cabinet	2(L) * 4(H)	2(L) * 4(H)	2(L) * 4(H)
	Transparency Rate	≈53%	≈53%	≈70%
Cabinet Parameter	Cabinet Size(mm)	1000(L) * 500(H)	1000(L) * 500(H)	1000(L) * 500(H)
	Cabinet Weight	7.5 kg	7.5 kg	7.5 kg
	Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
	Cabinet Resolution(Pixel)	256(L) * 64(H)	256(L) * 64(H)	128(L) * 64(H)
	Protection Grade	IP33	IP33	IP33
Electricity Parameter	Brightness	4500 cd/m²	2500 cd/m²	4500 cd/m²
	Best Viewing Distance	≥3.91m	≥3.91m	≥7.82m
	Max. Power Consumption	800W/m²	800W/m²	800W/m²
	Avg. Power Consumption	220W/m²	220W/m²	220W/m²
	Screen Refresh Frequency	1920Hz / 3840Hz	1920Hz / 3840Hz	1920Hz / 3840Hz
	Frame Frequency	≥60Hz	≥60Hz	≥60Hz
	Viewing Angle	140°(Horizontal); 140°(Vertical)	140°(Horizontal); 140°(Vertical)	140°(Horizontal); 140°(Vertical)
	Gray Grade	14bits	14bits	14bits
	Display Color	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors
	Brightness Adjustment	100 grades by software or automatically by sensor	100 grades by software or automatically by sensor	100 grades by software or automatically by sensor
	Operation Power	AC100-240V 50-60Hz Switchable	AC100-240V 50-60Hz Switchable	AC100-240V 50-60Hz Switchable
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
	Control Distance	100M (Ethernet cable);20KM (Optical fiber cable)	100M (Ethernet cable);20KM (Optical fiber cable)	100M (Ethernet cable);20KM (Optical fiber cable)
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200
	Color Temperature	5000—9300 adjustable	5000—9300 adjustable	5000—9300 adjustable
	Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet	Pixel by pixel, module by module, cabinet by cabinet	Pixel by pixel, module by module, cabinet by cabinet
	Working Temperature	-10 ~ +65 °C	-10 ~ +65 °C	-10 ~ +65 °C
	Storage Temperature	-40 ~ +85 °C	-40 ~ +85 °C	-40 ~ +85 °C
	Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
	Lifetime	100,000 hours	100,000 hours	100,000 hours
	MTBF	>10,000 hours	>10,000 hours	>10,000 hours
	Continuous Operating Time	≥72 hours	≥72 hours	≥72 hours
	Out-of-Control Pixel Rate	≤0.01%	≤0.01%	≤0.01%

EagerLED Leading LED Display Manufacturer



Whatsapp

+86 152 2013 3050



Website

eagerled.com



Youtube

@EagerLED



Tiktok

@eagerleddisplay